

INSTALLATION INSTRUCTIONS

For Outdoor Lantern (Rev. 08/14/2012)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the circuit breaker and remove old fixture including mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to misplace any small part necessary for installation.
3. Pull black, white and ground wires out of post.
4. Next, connect electrical wires while supporting the lantern. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post. Align the lantern with post and secure with sheet metal screws. (Fig.1 &2)
5. At this point, you may install the desired light bulbs. **(DO NOT EXCEED MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)** For installing bulbs or replacing bulbs at a later date, remove finial and dome. After the installation, replace the dome and tighten with Finial. (Fig. 1)

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


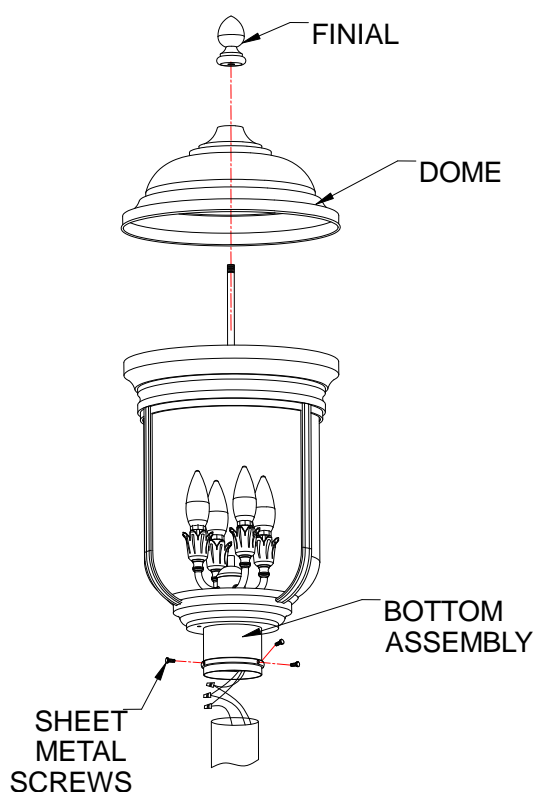


Fig. 2

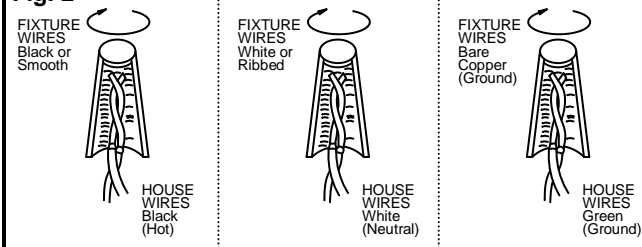

“U.S.Patent; D436,208

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.”

© 1998 Minka Lighting, Inc.



LA-287E