

IWA 3S + DryDock™ 18 in stock

IWA-3-S-DD-18-S-BA



Natural Golden Bamboo

IWA-3-S-DD-18-S-GT



Graphite Wood Composite

IWA-3-S-DD-18-S-WH



Designer White Resin*

IWA-3-S-DD-18-S-GR



Exclusive Gray Resin*

Specifications


Single bowl
 Users: 1
 Wash Tools included: Five (8 pcs)
 Outside dimensions: 51 1/2" x 19 1/2" x 2 1/16"
 Counter top cutout: 50 1/2" x 18"
 Minimum cabinet size: 54" or 135cm
Minimum clearance required for DryDock™ below counter top: 2"
 DryDock™ location: Drain side (S)

Wash Tools included

- (1) Upper Tier Drying Rack 12 1/4" x 18"
- (1) Lower Tier Mini Drying Rack 6" x 17"
- (1) Lower Tier Utensil Caddy 6" x 17"
- (1) Dual Tier Drying Rack 18" x 17"
- (1) 18" Upper Deck

Basin construction

16GA 316L stainless steel indoor/outdoor
 Angel finish
 Two tier design
 Star™ groove pattern
 Reversible side drain
 Elevated drain cover included
 Limited Lifetime Warranty
 Made in the USA
 ASME A112.19.3/CSA B45.4 certified

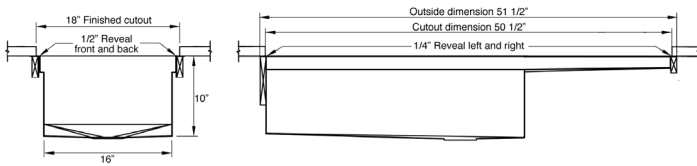

Suggested maximum inside corner radius of counter top cutout 3/8"

Center Tap hole diameters 2" behind cutout

1. Galley Tap 1 3/8" min hole diameter (1 1/2" min hole diameter for fast water jet cut)
 2. Galley Deck Switch 1 3/8" min hole diameter or Galley Automatic Strainer Basket knob 1" min and 1 3/8" max hole diameter
 3. Galley Hot and Cold Water Dispenser* 1 3/8" min hole diameter (1 1/2" min hole diameter for fast water jet cut) or Galley Soap Dispenser 1" min to 1 3/8" max hole diameter
- *Galley Hot and Cold Water dispenser requires a minimum 8" clearance to center if installed to the right of the Galley Tap

