

Basin mixer


Sales reference

00151/US : BASIN MIXER 3 HOLES WITH POP UP WASTE



Head reference

4134/ICD : Rim mounted 1/2", ceramic head 1/4 turn right

4134/ICG : Rin mounted 1/2", ceramic head 1/4 turn left

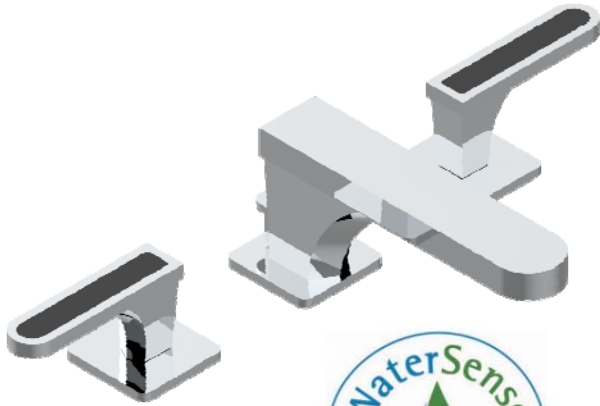

Certified by
NSF International
ASME A112.18.1/
CSA B125.1
1.5 GPM [5.7 L/min]

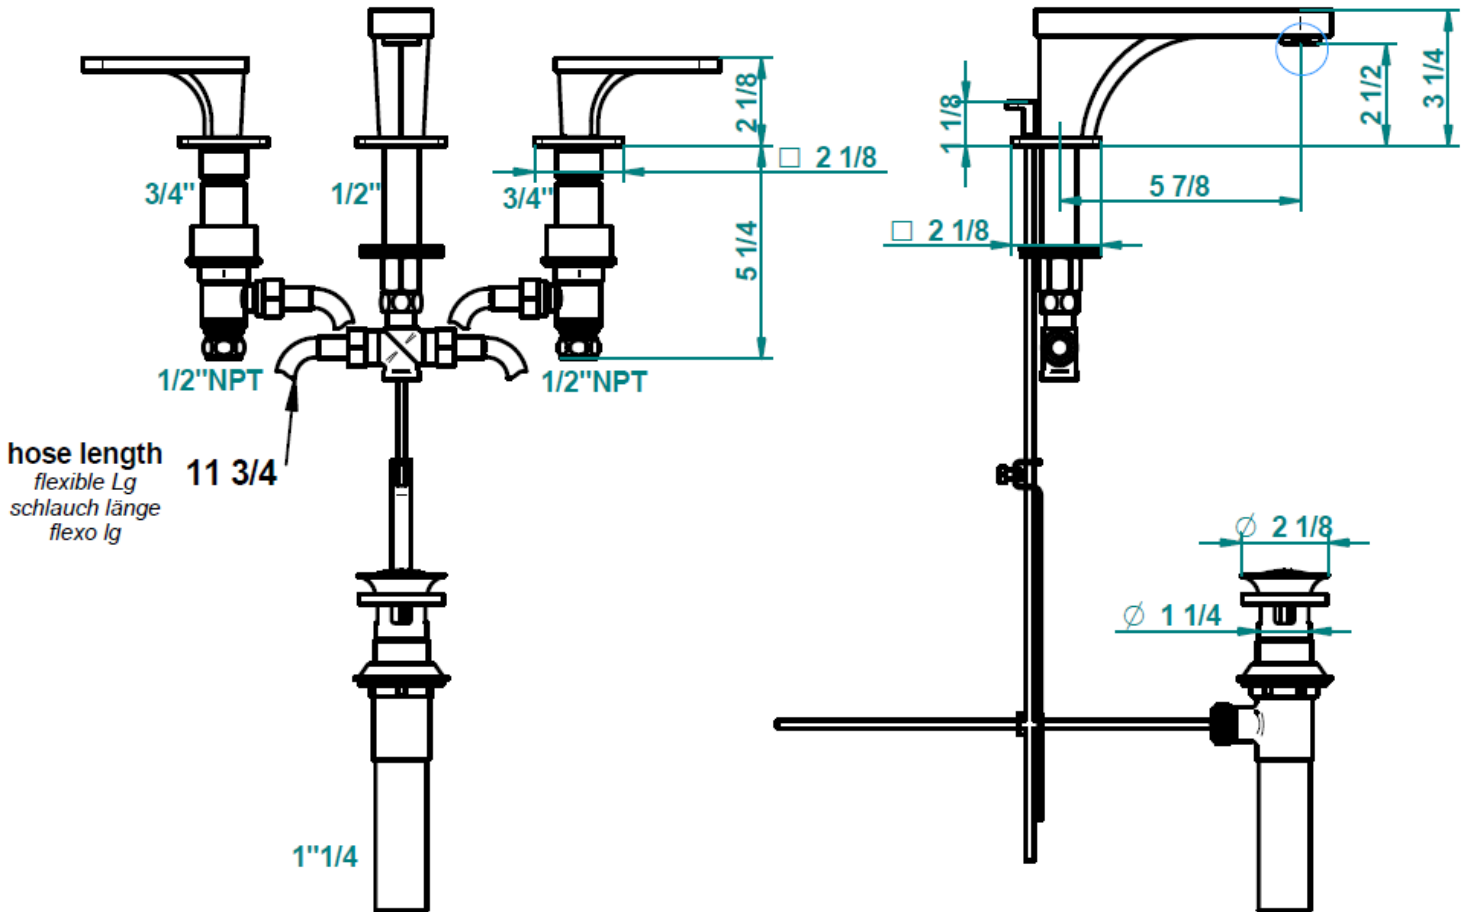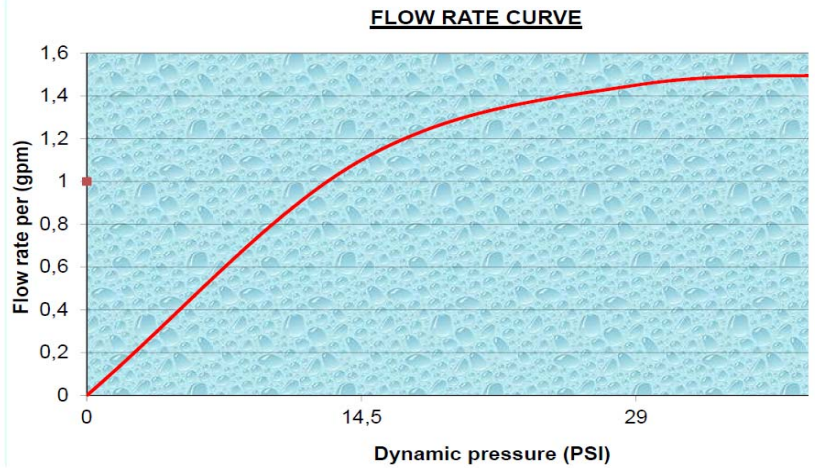

hose length
flexible Lg
schlauch länge
flexo lg


11 3/4

1"1/4

1 / 4



recommended drilling \varnothing

*\varnothing de perçage conseillé
empfohlener abstand
 \varnothing de perforación aconsejado*

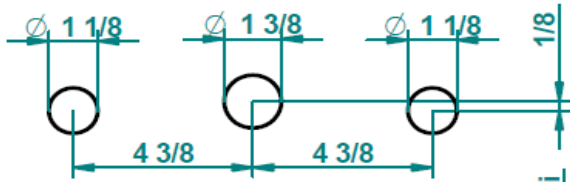

recommended interval width



*entraxe conseillé
empfohlener abstand
distancia entre taladros aconsejado*

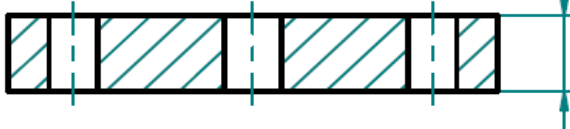

Installation



Place the rim mounted

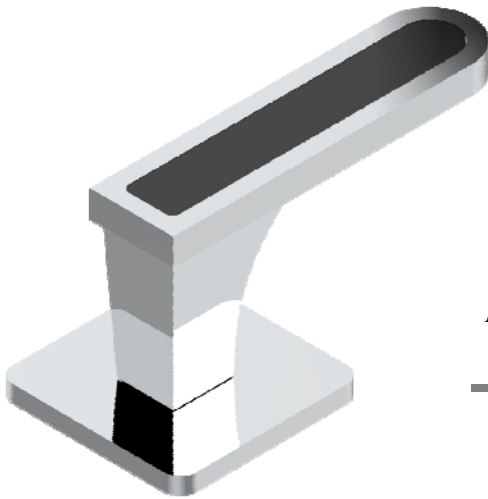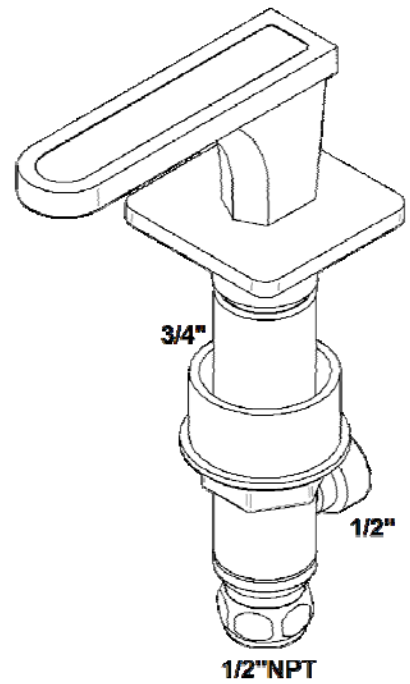

Place the lever and screw the flange



Overtighten the nut

WARRANTY, CLEANING AND MAINTENANCE

Terms of warranty

- ❖ Valves, fitting and our chrome finish are covered by a 5 year general Warranty.
- ❖ All other finishes are Warranted for 1 year.
- ❖ All faulty items must be inspected by the factory before Warranty claims are accepted.

- ❖ Installations must be carried out by professional plumbers / contractors and in accordance with the code of practice and standards in line with DTU.
- ❖ Products must be used and maintained in accordance with their purpose and in line with manufacturers instructions.
- ❖ Product must be regularly maintained and must include regular cleaning out of aerators and filters. Where necessary systems should be de-scaled to reduce the damaging effects of hard water calcium build up which are beyond the control of the manufacturer.
- ❖ Cleaning must be undertaken with non-abrasive and non-corrosive products and cloths.

Warranty exclusions

- ❖ Normal wear and tear of working parts to include diverters, ceramic heads, spindle heads, ceramic or thermostatic cartridges, hoses.
 - ❖ Frost damage
 - ❖ Accidental impact
 - ❖ Use of corrosive or abrasive products which includes marble cleaners.
 - ❖ Damage from particles of dirt, etc caused by lack of cleaning of aerators or filters.
 - ❖ Incorrect installation.
 - ❖ Damage to products caused by installation or dismantling.

After-sales service for defective product

- ❖ Defective items must be returned to the factory at the clients expense and addressed to the THG After Sales Department. We recommend that returned items are correctly insured during transit.
 - ❖ Product must be carefully wrapped by the returnee, with each item individually protected to prevent any impact during delivery. We recommend a digital image be taken of the wrapped goods to confirm their packing.
 - ❖ Upon receipt of the returned items goods will be inspected by THG Quality Control and a report will be prepared. Such report will determine if the alleged fault/damage is a result of the manufacturer.
- ❖ Goods found to be defective will be repaired or changed at no charge to the client.
❖ Goods found NOT to be defective will be repaired or changed at full charge to the client.

All our products are checked for water tightness. In order to maintain the warranties it is necessary to regularly drain through water systems to ensure the prevention of dirt damage to the ceramic heads and cartridges and thermostatic cartridges.

Cleaning

Abrasive products which contain alcohol, acid or anti-scale ingredients are prohibited and will nullify the Warranty.



To maintain fittings in perfect condition, cleaning is recommended after every use with soapy water applied, rinsed and then dried off with a soft, non-abrasive cloth.



ing of the valves and noble materials: **PIERRE, EBONY, HORN ... must be done with SOAPY WATER AND A SOFT CLOTH, A RINSE WATER AND WIPE WITH A SOFT CLOTH.**

For a deeper clean and to remove residual or corrosive markings we recommend a monthly application of a suitable cleaner for the metal installed or we offer the following recommended cleaning products:

CHROME and NICKEL ➤ **Renov'rob** (sales refs: 140R and 140MR)

For use on finishes this wax and organic soap based cleaner, applied and removed with a non-abrasive soft cloth, creates a protective wax-film which enables the fittings to be polished and produces a lasting brightness.

Commercial ref. cleaning set : SNI

GOLD, LUXBRASS and SATIN ➤ **Brillor** (sales refs: 140B and 140MB)

For use on finishes this fatty-acid soap and micro-granules of organic content, applied and removed with a non-abrasive soft cloth, creates a protective wax film which enables the fittings to be polished and produces a lasting brightness. (satin Finishes should be lightly buffed). **Commercial ref. cleaning set : SN2**

AERATORS

Aerators must be regularly cleaned to remove the build up of limestone and to maintain a steady flow of water.

Dilute 1 part white vinegar to 8 parts water and soak the aerators in this solution for 10 minutes then gently clean with soft toothbrush. (Replacement aerators are available and are referenced in our catalogue)

HEAD SHOWERS AND HAND SHOWERS

As with aerators these should be removed each 6-8 weeks and soaked in the same solution (8 parts water – 1 part white vinegar)

For handshowers which are not equipped with hard-water protection, we recommend you to do a regular cleaning in water with some white vinegar.

SKY SHOWER

Regularly for the durability of your ceiling shower, you must perform maintenance on it.

To do this, pass a raclette in all directions on the shower ceiling and the spikes. This will prevent the limestone to be formed in the spikes and thus they do not blocked up.

THERMOSTATIC

In order to guarantee a lasting functioning, it's compulsory to activate thermostats at least once a month on the whole range of temperature adjustment.

Concerned references: 5100, 5200, 8100, 8105, 8200, 8200N, 8240, 8300 and 8400.

CERAMIC CARTRIDGE

Ceramic cartridges with a diameter of 35mm are equipped with a temperature stop to adjust the maximal temperature of hot water.

