




CHARACTERISTIC

- Requires concealed thermostat ref. 5200AE, 5200AE/US and 5200AE/W
- Temperature control knob with security stop at 38°C
- On/off valves (or diverter with stop function) required for each shower function
- Solid brass plate and knob
- ASME : ASME A112.18.1-2011/CSA B125.1-11
- DVGW : DW-6512CQ0608

STANDARDS

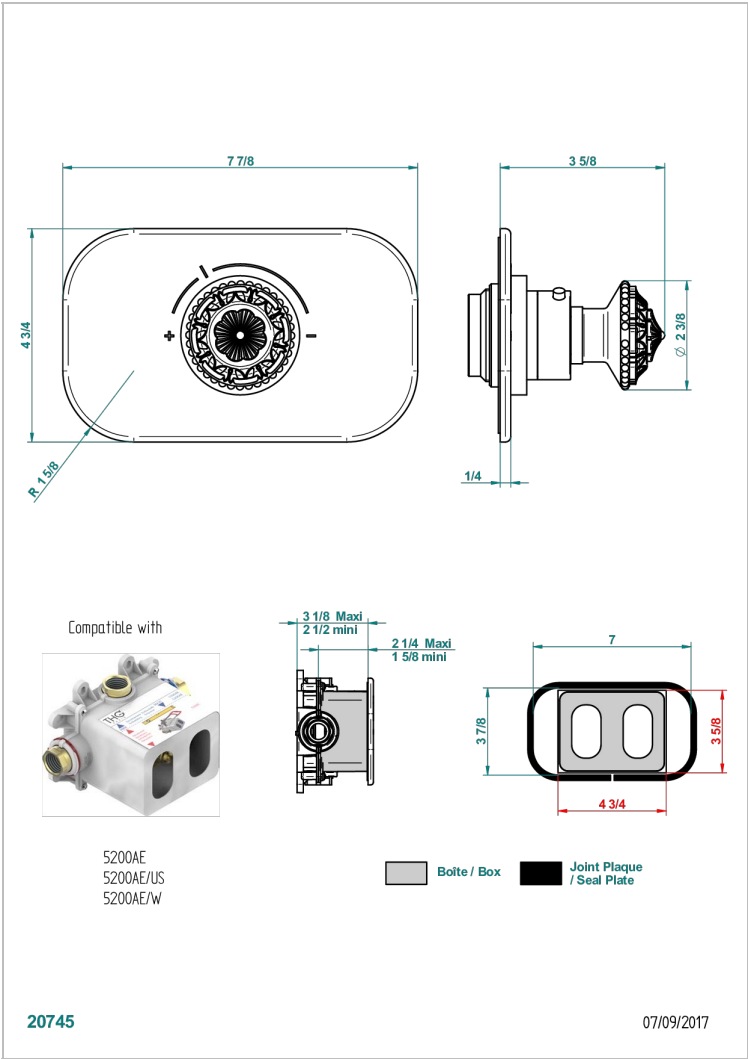

RELATED SKU'S

- Ref. G00-5100C Extention kit for thermostatic mixing valve - for installation between 80 mm and 125 mm
- Ref. G00-5100G Reinforced stop ring for THG thermostatic with fixing set
- Ref. G00-5200AE/US 3/4" THG thermostat, 60 l/min with wax cartridge, delivered with a built-in box, no trim

AVAILABLE FINITIONS

Black nickel - D24	Copper antique matt, coated - H07	Light coated bronze - D01	Matt gold color PVD - H53	Nickel polished - B01
Blush PVD - H62	Gold color PVD - H52	Matt Umber PVD - H67	Matt graphite PVD - H65	Rose Gold - F27
Brass color PVD - H49	Gold mat - F07	Matt blush PVD - H60	Matt nickel (American satin) - C01	Satin chrome - C03
Brown bronze color PVD - F33	Gold polished - F01	Matt brass color PVD - H50	Matt nickel color PVD - H56	Silver polished, antique - H03
Chrome polished - A02	Gold satiney - F03	Matt brown bronze color PVD - F34	Nickel antique / Sovereign - H28	Silver rhodium - F18
Chrome polished / gold polished - G02	Graphite PVD - H64	Matt chrome (American satin) - C02	Nickel color PVD - H55	Soft gold - F30