
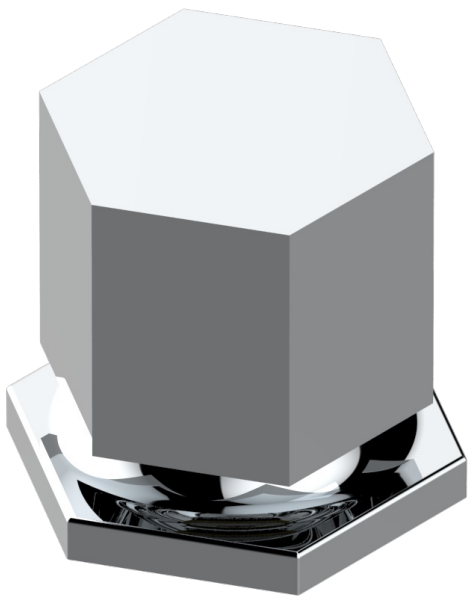



recommended drilling ø
ø de perçage conseillé
empfohlener abstand
Ø de perforación aconsejado



30063

18/05/2010

CHARACTERISTIC

- ASME : ASME A112.18.1-2011/CSA B125.1-11

STANDARDS



AVAILABLE FINITIONS

Black nickel - D24	Gold color PVD - H52	Matt blush PVD - H60	Matt nickel (American satin) - C01	Silver rhodium - F18
Blush PVD - H62	Gold mat - F07	Matt brass color PVD - H50	Matt nickel color PVD - H56	Soft gold - F30
Brass color PVD - H49	Gold polished - F01	Matt brown bronze color PVD - F34	Nickel antique / Sovereign - H28	Soft matt gold - F31
Brown bronze color PVD - F33	Gold satiney - F03	Matt chrome (American satin) - C02	Nickel color PVD - H55	Umber PVD - H66
Chrome polished - A02	Graphite PVD - H64	Matt gold color PVD - H53	Nickel polished - B01	
Chrome polished / gold polished - G02	Matt Umber PVD - H67	Matt graphite PVD - H65	Satin chrome - C03	