
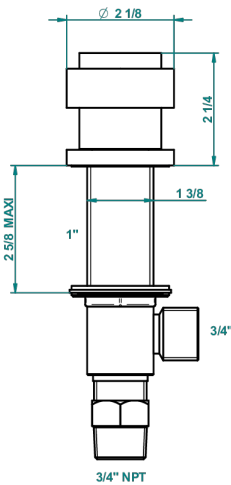




DIPLOMATE SMOOTH RINGS

U4A-36/US

3/4" deck valve with trim

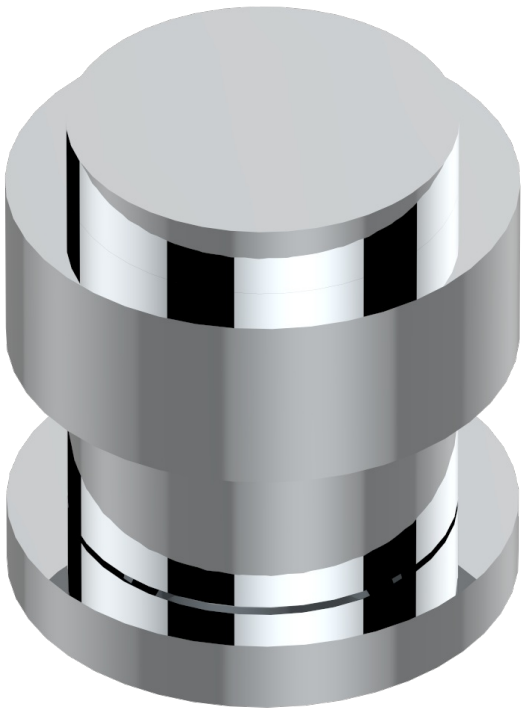

recommended drilling ø
ø de perçage conseillé
empfohlener Abstand
Ø de perforación aconsejado



38437

25/04/2016

CHARACTERISTIC

- ASME : ASME A112.18.1-2011/CSA B125.1-11

STANDARDS



AVAILABLE FINITIONS

Black nickel - D24	Copper antique matt, coated - H07	Light coated bronze - D01	Matt gold color PVD - H53	Nickel polished - B01
Blush PVD - H62	Gold color PVD - H52	Matt Umber PVD - H67	Matt graphite PVD - H65	Rose Gold - F27
Brass color PVD - H49	Gold mat - F07	Matt blush PVD - H60	Matt nickel (American satin) - C01	Satin chrome - C03
Brown bronze color PVD - F33	Gold polished - F01	Matt brass color PVD - H50	Matt nickel color PVD - H56	Silver polished, antique - H03
Chrome polished - A02	Gold satiney - F03	Matt brown bronze color PVD - F34	Nickel antique / Sovereign - H28	Silver rhodium - F18
Chrome polished / gold polished - G02	Graphite PVD - H64	Matt chrome (American satin) - C02	Nickel color PVD - H55	Soft gold - F30