



ETZST-52, ETZST-52/R35

SPECIFICATION

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- PRESSURE BALANCED VALVE
- 3 FUNCTIONS DIVERTER VALVE WITH HALF ZONES
- ASSEMBLED WITH PVC HOSES
- SUPPLIED WITH 1/2" HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 25 PSI, MAXIMUM 80 PSI
- 1/2" CONNECTION

AVAILABLE OPTION

- ADDITION OF A DIVERTER SPOUT (REF. MODEL ETZG-52/R35)

AVAILABLE FINISH

- BRUSHED STAINLESS STEEL : ETZST-52

ACCESSORIES

ACCESSORIES	ETZST-52	ETZST-52/R35
SHOWER HEAD	BJ-112-BC	BJ-112-BC
HAND SHOWER	HS-210	HS-210
SUPPORT	HSH-103	HSH-103
HOSE	SSH-150	SSH-150
DIVERTER SPOUT	HC-105	R-35


FLOW RATE

PRESSURE BALANCED VALVE	24 L/MIN [6.3 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
JETS (3)	10.9 L/MIN [2.9 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

WARRANTY

PRODUCTS COVERED BY A 5-YEAR WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

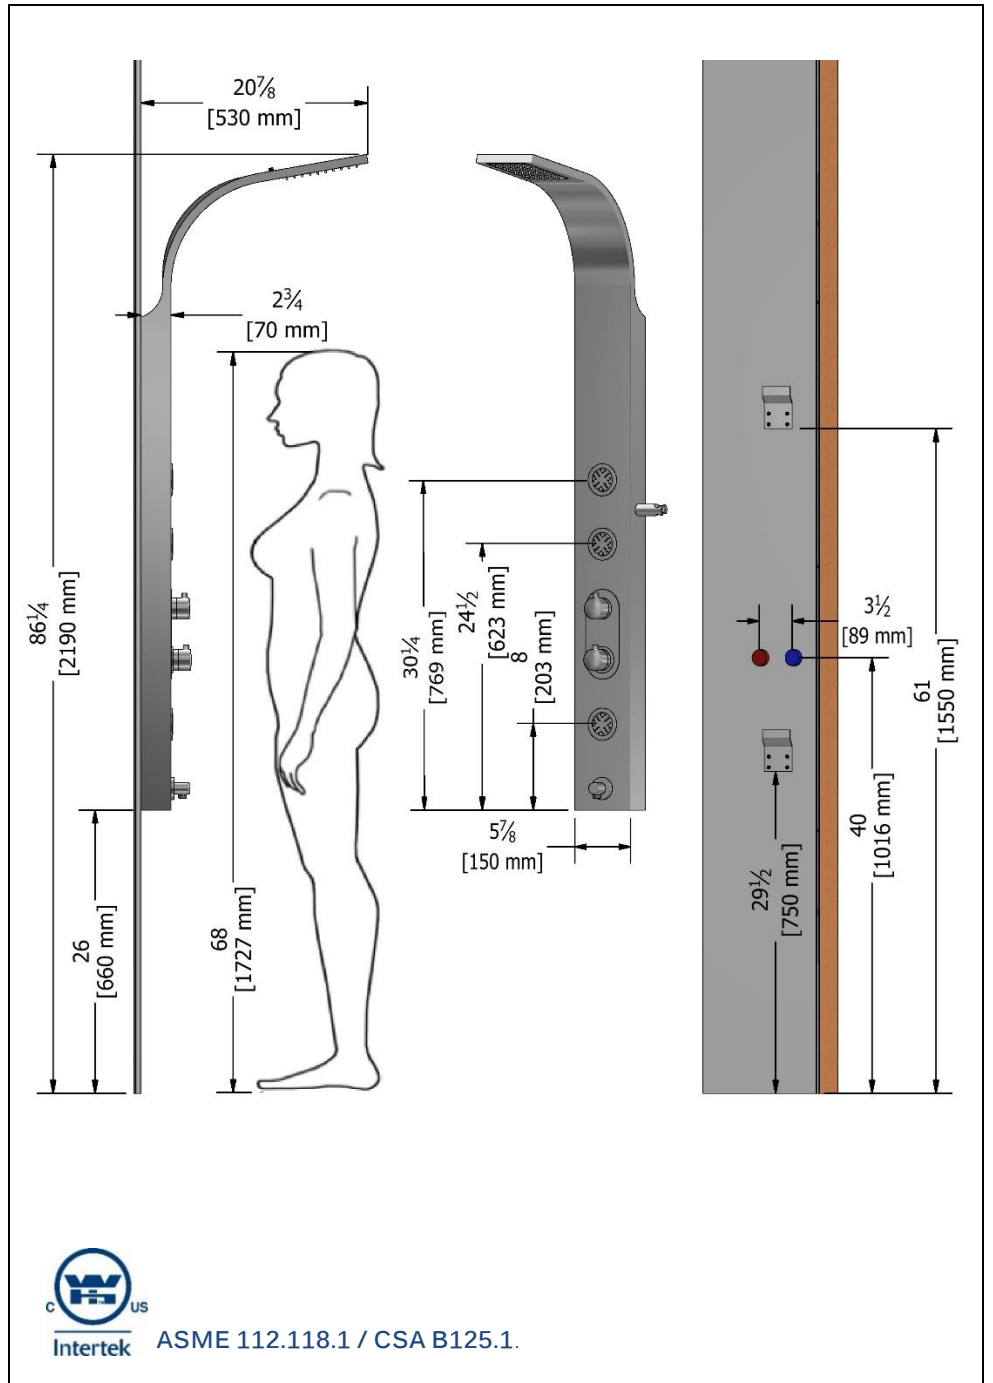

ASME 112.118.1 / CSA B125.1.

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018