



TZG1-XX-RU/S8, TZG1-XX-RU/S10, TZG1-XX-RU/S12,
TZG11-XX-RU/S8, TZG11-XX-RU/S10, TZG11-XX-RU/S12

SPECIFICATION

- BRUSHED STAINLESS STEEL SHOWER COLUMN CASING, GRADE #304
- 6MM THICK TEMPERED GLASS FACING
- ½" THERMOSTATIC VALVE
- 3 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" HI-FLOW INLET HOSES

AVAILABLE OPTION

- AVAILABLE WITH OR WITHOUT BODY JETS
- CHOICE OF 3 SIZES OF SHOWER HEADS (8",10",12")
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

AVAILABLE FINISH

- TEMPERED GLASS: LAMINATED VINYL BACKING FINISHES
REFER TO WEBSITE FOR CHOICE OF COLORS

ACCESSORIES

ACCESSORIES	TZG1-XX-RU/S8	TZG1-XX-RU/S10	TZG1-XX-RU/S12	TZG11-XX-RU/S8	TZG11-XX-RU/S10	TZG11-XX-RU/S12
SHOWER HEAD	SSTS-08-R	SSTS-10-R	SSTS-12-R	SSTS-08-R	SSTS-10-R	SSTS-12-R
HAND SHOWER	HS-212	HS-212	HS-212	HS-212	HS-212	HS-212
SUPPORT	HSH-302	HSH-302	HSH-302	HSHC-103-70	HSHC-103-70	HSHC-103-70
HOSE	SSHE-175	SSHE-175	SSHE-175	SSHE-150	SSHE-150	SSHE-150
DIVERTER SPOUT	R-35	R-35	R-35	R-25	R-25	R-25


FLOW RATE

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
BODY JETS (6)	14.5 L/MIN [3.8 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

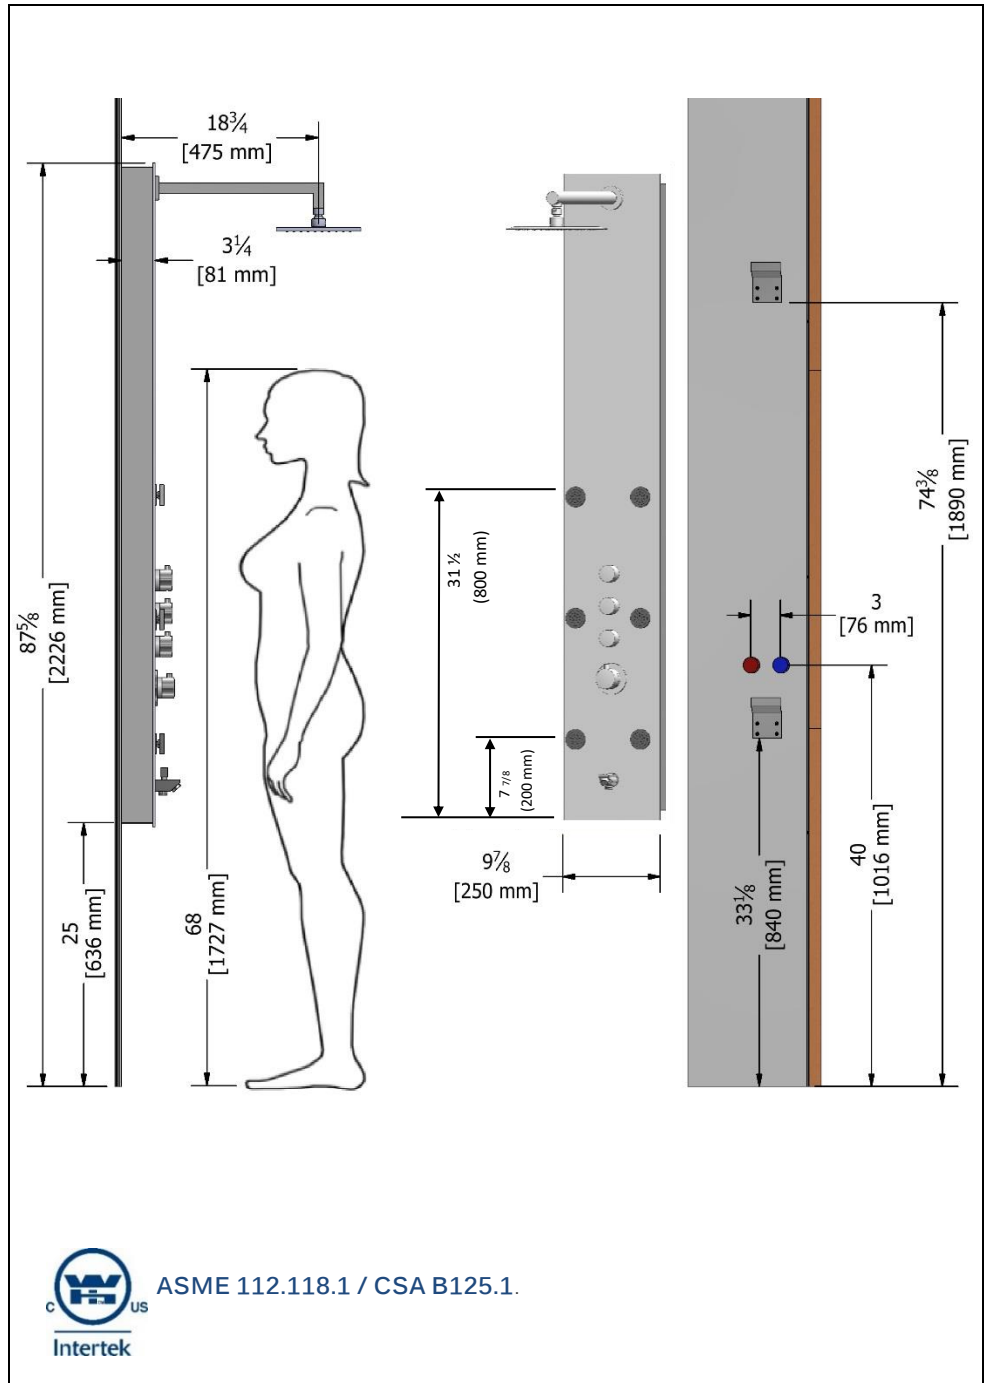

ASME 112.118.1 / CSA B125.1.

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018