



TZG4-XX-RU/4, TZG4-XX-RU/4L, TZG14-XX-RU/4, TZG14-XX-RU/4L

### SPECIFICATION

- CHROME STAINLESS STEEL SHOWER COLUMN CASING, GRADE #304
- 6MM THICK TEMPERED GLASS FACING
- ½" THERMOSTATIC VALVE
- 4 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" CONNECTION

### AVAILABLE OPTION

- AVAILABLE WITH OR WITHOUT BODY JETS
- SHOWER HEAD WITH LED
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

### AVAILABLE FINISH

- TEMPERED GLASS: LAMINATED VINYL BACKING FINISHES  
REFER TO WEBSITE FOR CHOICE OF COLORS

### ACCESSORIES

ACCESSORIES	TZG4-XX-RU/4	TZG4-XX-RU/4L	TZG14-XX-RU/4	TZG14-XX-RU/4L
SHOWER HEAD	BJ-17-4	BJ-17-4L	BJ-17-4	BJ-17-4L
HAND SHOWER	HS-212	HS-212	HS-212	HS-212
SUPPORT	HSH-302	HSH-302	HSHC-103-70	HSHC-103-70
HOSE	SSHE-175	SSHE-175	SSHE-150	SSHE-150
DIVERTER SPOUT	R-35	R-35	R-25	R-25


### FLOW RATE

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
JETS (2)	9.7 L/MIN [2.6 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

### WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS. 5-YEAR WARRANTY ON THE LED LIGHTING SYSTEM.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

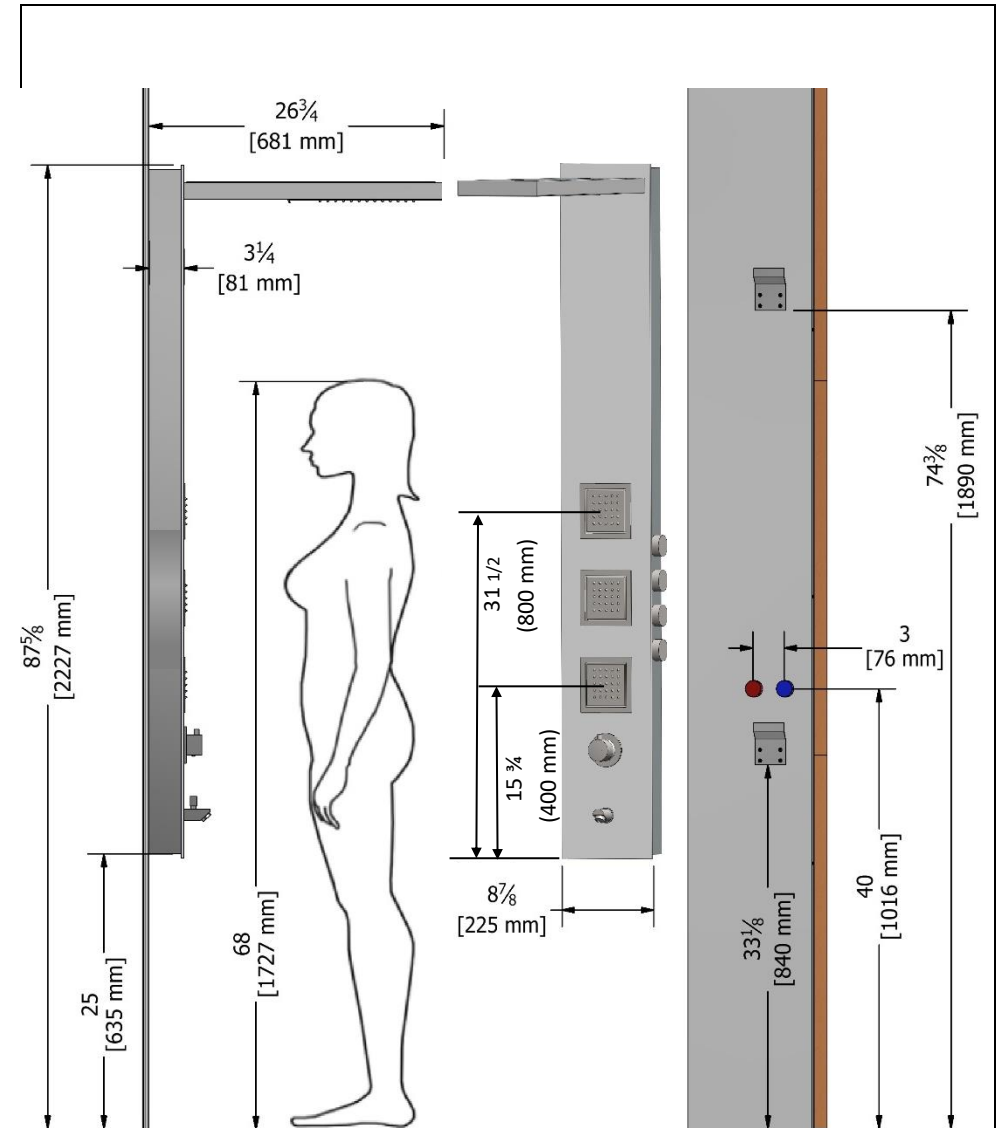

ASME 112.118.1 / CSA B125.1.

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018