

SHOWER COLUMN : TZST-06.1

SPECIFICATION

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- THERMOSTATIC VALVE
- 4X SHUT-OFF VALVE WITH CERAMIC DISCS
- ASSEMBLED WITH BRAIDED STAINLESS STEEL HOSES
- SUPPLY WITH ½" HI-FLOW HOSES
- ANTI-SCALE SILICON NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI

AVAILABLE OPTION

- RD-XX : HAND SHOWER HOOK REPLACED BY A SLIDING BAR

AVAILABLE FINISH

- BRUSHED STAINLESS STEEL : TZST-06.1
- MIRROR BLACK : TZSTBL-06.1
- CHROME : TZSTC-06.1

ACCESSOIRES

| | |
|----------------------|-----------|
| SHOWER HEAD | SSTS-08-S |
| DOUCHETTE | HS-203 |
| SUPPORT DE DOUCHETTE | HSH-302 |
| BOYAU 175CM [69"] | SSHE-175 |
| BEC DÉVIATEUR | R-36 |

CONNEXION

- ½" FEMALE


FLOW RATE

| | |
|--------------------|---------------------------------|
| THERMOSTATIC VALVE | 30 L/MIN [7,9 GPM] @ 60 PSI |
| SHOWER HEAD | 7,9 L/MIN [2,1 GPM] @ 60 PSI |
| HAND SHOWER | 9,5 L/MIN [2,5 GPM] @ 60 PSI |
| BODY JETS (6) | 14,5L / MIN; [3,8 GPM] @ 60 PSI |
| DIVERTER SPOUT | 17 L/MIN [4.5 GPM] @ 60 PSI |

GARANTIE

PRODUCTS COVERED BY A FULL LIFETIME LIMITED WARRANTY AGAINST ALL MANUFACTURING DEFECTS ON THE FAUCET AND FINISH.

FOR MORE INFORMATION ABOUT THE PRODUCT OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE GUIDE.

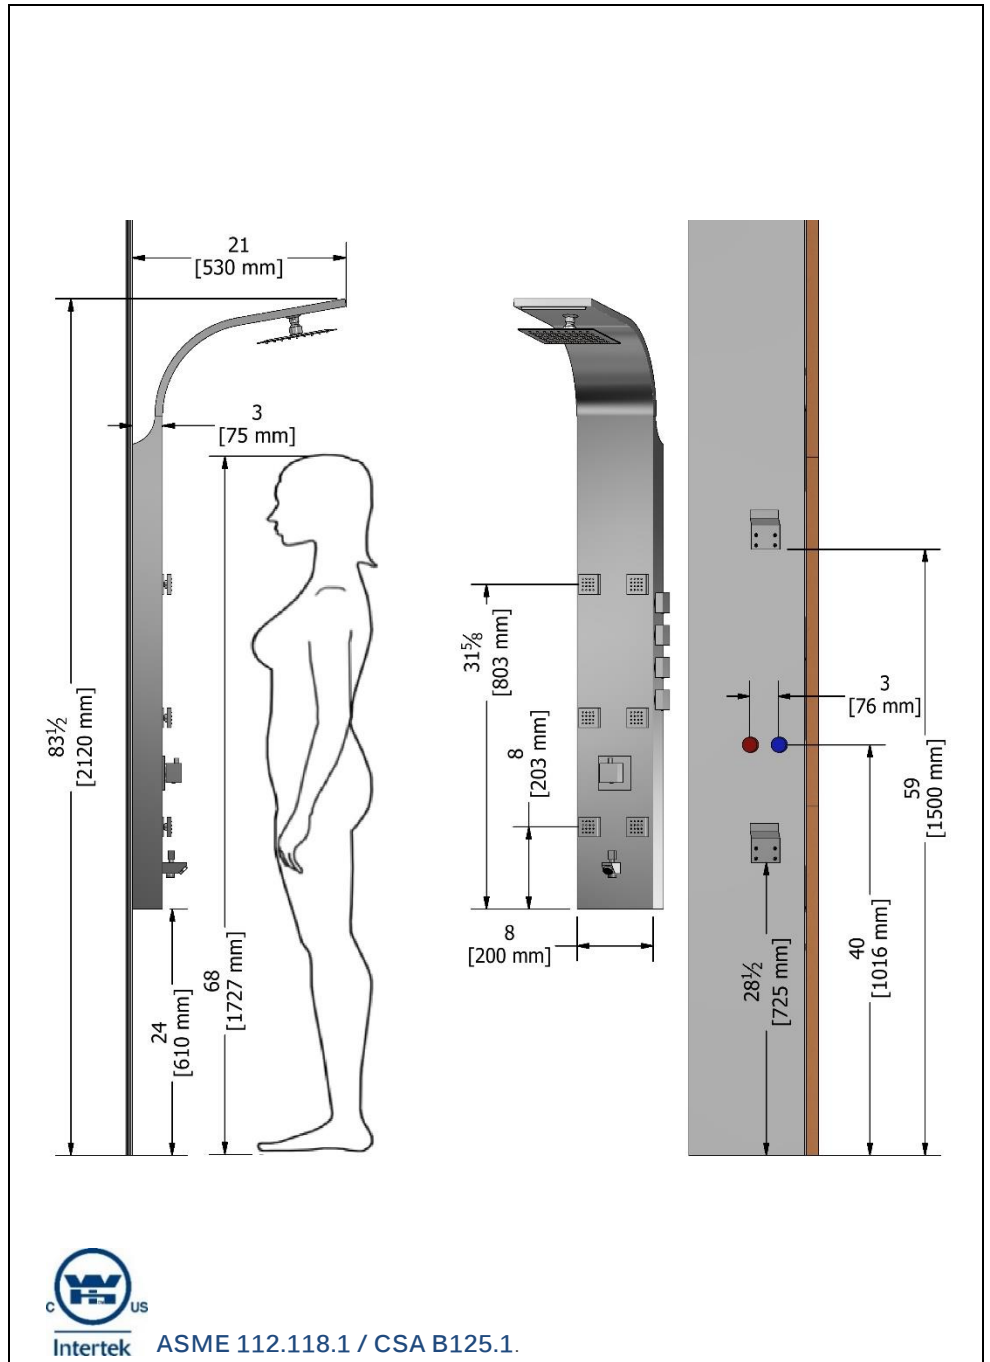

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

EDITION : 28-11-2016