

# TZSTC-17L

### **SPECIFICATION**

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- ½" THERMOSTATIC VALVE
- 4 SHUT-OFF VALVES WITH VOLUME CONTROL
- SHOWER HEAD WITH LED LIGHTS POWERED BY WATER TURBINE GENERATOR
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH 1/2" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- Pressure: Minimum 35 psi, maximum 80 psi
- ½" CONNECTION

### **AVAILABLE OPTION**

- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

### **AVAILABLE FINISH**

- CHROME: TZSTC-17L

### **ACCESSORIES**

| Accessories    | TZSTC-17L |
|----------------|-----------|
| SHOWER HEAD    | BJ-17-4L  |
| HAND SHOWER    | HS-203    |
| SUPPORT        | HSH-302   |
| Hose           | SSHE-175  |
| DIVERTER SPOUT | R-36      |


### **FLOW RATE**

| THERMOSTATIC VALVE | 30 L/MIN [7.9 GPM] @ 60 PSI   |
|--------------------|-------------------------------|
| Shower head        | 9.5 L/MIN [2.5 GPM] @ 60 PSI  |
| HAND SHOWER        | 9.5 L/MIN [2.5 GPM] @ 60 PSI  |
| JETS (3)           | 10.9 L/MIN [2.9 GPM] @ 60 PSI |
| DIVERTER SPOUT     | 17 L/MIN [4.5 GPM] @ 60 PSI   |
| SPOUT              | 19.7 L/MIN [5.2 GPM] @ 60 PSI |

## WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS. 5-YEAR WARRANTY ON THE LED LIGHTING SYSTEM.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

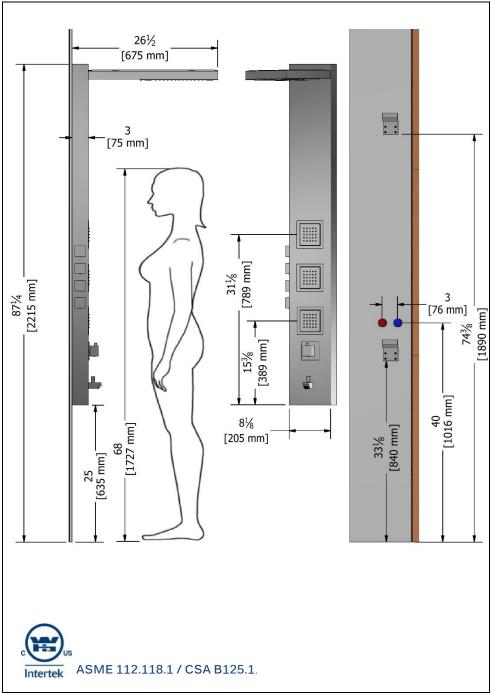

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

Rev.: 02/2018