

TZSTC-18-S8, TZSTC-18-S10, TZSTC-18-S12

SPECIFICATION

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- ½" THERMOSTATIC VALVE
- 3 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH 1/2" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- Pressure: Minimum 35 psi, maximum 80 psi
- ½" CONNECTION

AVAILABLE OPTION

- Choice of 3 sizes of shower heads (8",10",12")
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

AVAILABLE FINISH

- CHROME: TZSTC-18

ACCESSORIES

ACCESSORIES	TZSTC-18-S8	TZSTC-18-S10	TZSTC-18-S12
SHOWER HEAD	SSTS-08-S	SSTS-10-S	SSTS-12-S
HAND SHOWER	HS-203	HS-203	HS-203
SUPPORT	HSH-302	HSH-302	HSH-302
Hose	SSHE-175	SSHE-175	SSHE-175
DIVERTER SPOUT	R-36	R-36	R-36


FLOW RATE

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI	
Shower head	9.5 L/MIN [2.5 GPM] @ 60 PSI	
HAND SHOWER	9.5 L/міn [2.5 gpм] @ 60 psi	
JETS (3) 10.9 L/MIN [2.9 GPM] @ 60 I		
DIVERTER SPOUT 17 L/MIN [4.5 GPM] @ 60 PSI		
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI	

WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

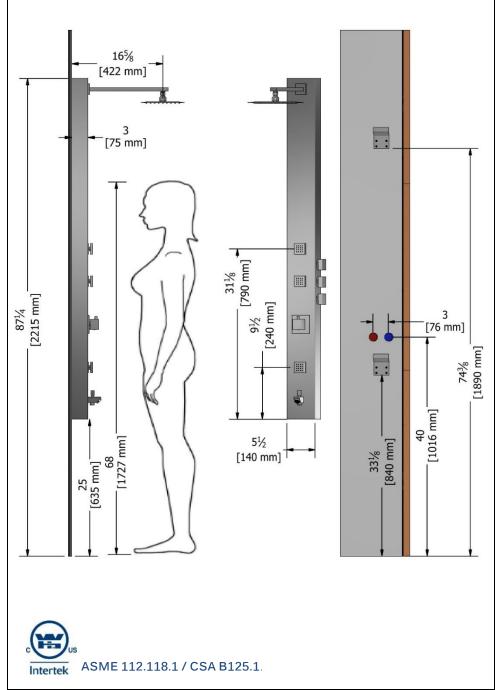

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

Rev.: 02/2018