

## Keane® Widespread Lavatory Faucet

### FEATURES

- WaterSense certified low-flow 1.2 gpm (4.5 lpm) faucet
- Lever handles
- Brass construction
- Ceramic disk valve cartridges
- Accommodates 6" -12" spread
- Metal pop-up drain assembly included

### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

### CODES/STANDARDS

- Complies with federal and state lead-free legislation
- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9, NSF 372
- Certifications: IAPMO(cUPC), EPA WaterSense, California Energy Commission (CEC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, City of New York and others
- ADA compliant



### PRODUCT SPECIFICATION



The widespread lavatory faucet shall have a maximum flow rate of 1.2 gpm (4.5 lpm). Product shall have lever handles. Product shall have a brass construction. Product shall have a ceramic disk valve cartridges. Product shall accommodate 6" -12" spread. Product shall include metal pop-up drain assembly. Product shall be TOTO Model TL211DD12#\_\_\_\_\_.

# TL211DD12

## Keane® Widespread Lavatory Faucet

### SPECIFICATIONS

- Warranty**  
 Lifetime Limited Warranty (Residential Use)  
 One Year (Commercial Use)
- Material**  
 Brass
- Maximum Flow Rate**  
 1.2 gpm (4.5 lpm)
- Shipping Dimensions**  
 13-1/2" L x 7-1/2" W x 4-3/4" H
- Shipping Weight**  
 8.6 lbs.

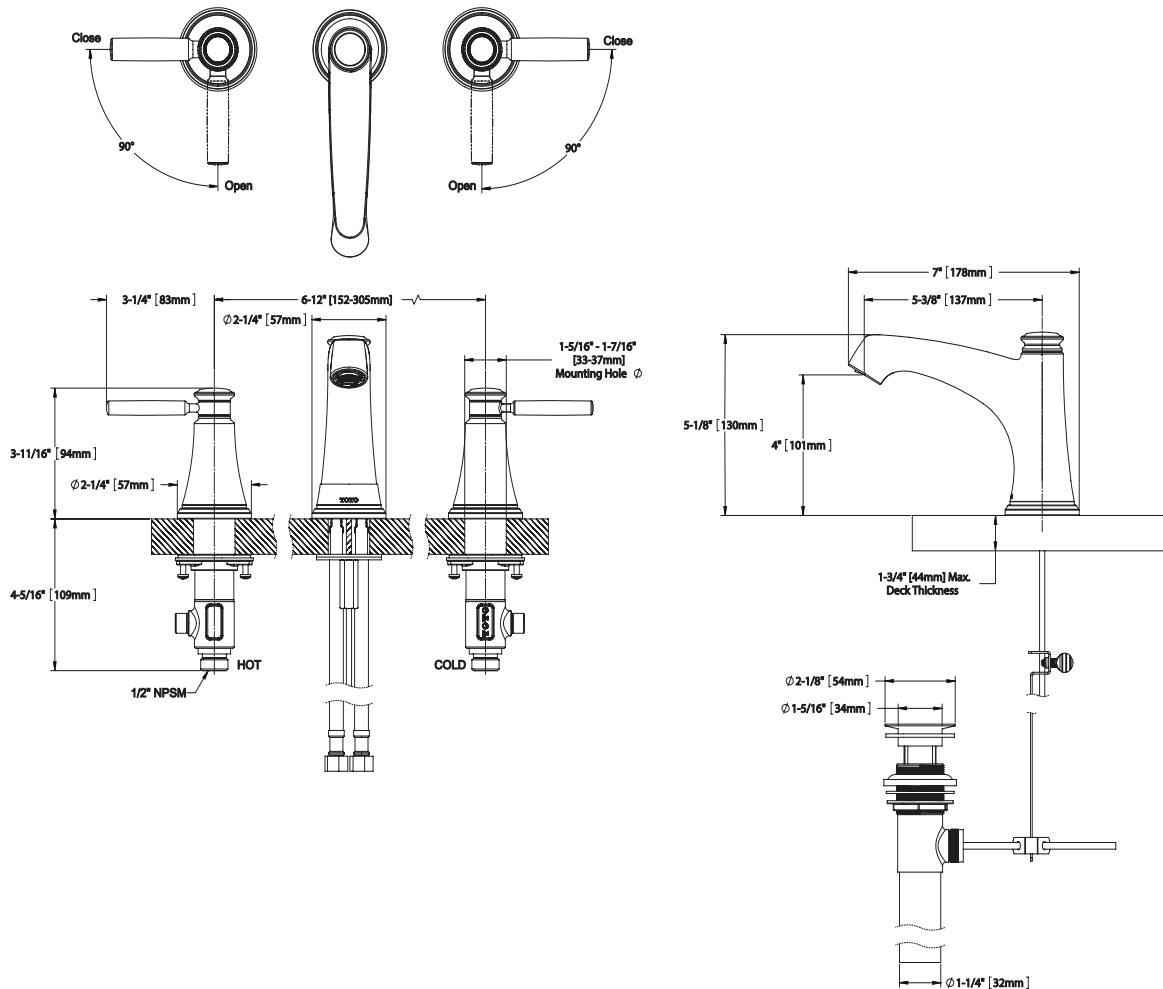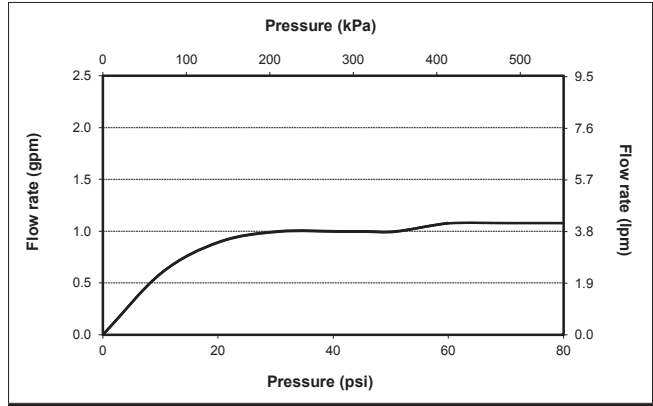

**TOTO**

*These dimensions and specifications are subject to change without notice*