

TOTO®

MS856124CUMG

UltraMax® One-Piece Toilet Toilet, 1.0 & 0.8 GPF

FEATURES

- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.0 & 0.8 GPF (3.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Elongated front bowl and seat
- Chrome plated trip lever
- 12" Rough-in
- Semi-concealed trapway

MODELS

- MS856124CUMG (#01, #12)
With CEFIONTECT ceramic glaze & includes SS124 SoftClose® seat

COMPONENTS

- SS124
SoftClose seat
- **Optional Components**
- THU773(#01, #PN, #BN)-A
Trip Lever - Cotton, Polished Nickel, Brushed Nickel

COLORS/FINISHES

- #01 Cotton
- #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece ultra high-efficiency DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.0 GPF/0.8 GPF. Toilet shall be 12" rough-in. Toilet shall have optional CEFIONTECT ceramic glaze. Toilet shall have elongated front bowl and chrome plated trip lever. Toilet shall be TOTO Model MS856124CUMG_____.



1G One Gallon Per Flush

CEFIONTECT

DYNAMAX TORNADO FLUSH

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



MS856124CUMG


UltraMax® One-Piece Toilet Toilet, 1.0 & 0.8 GPF

SPECIFICATIONS

Water Use	1.0 & 0.8 GPF (3.8 & 3.0 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/2"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	96 lbs.
Shipping Dimensions	29-1/4"L x 19-1/4"W x 19-3/4"H1, 27"H2

INSTALLATION NOTES


Back-to-Back Toilet Installations:
 TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

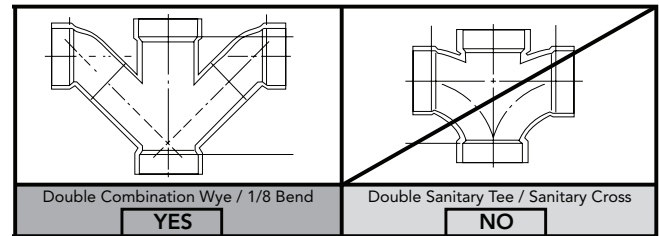

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft. Fixture Dimensions shown are nominal.

DIMENSIONS

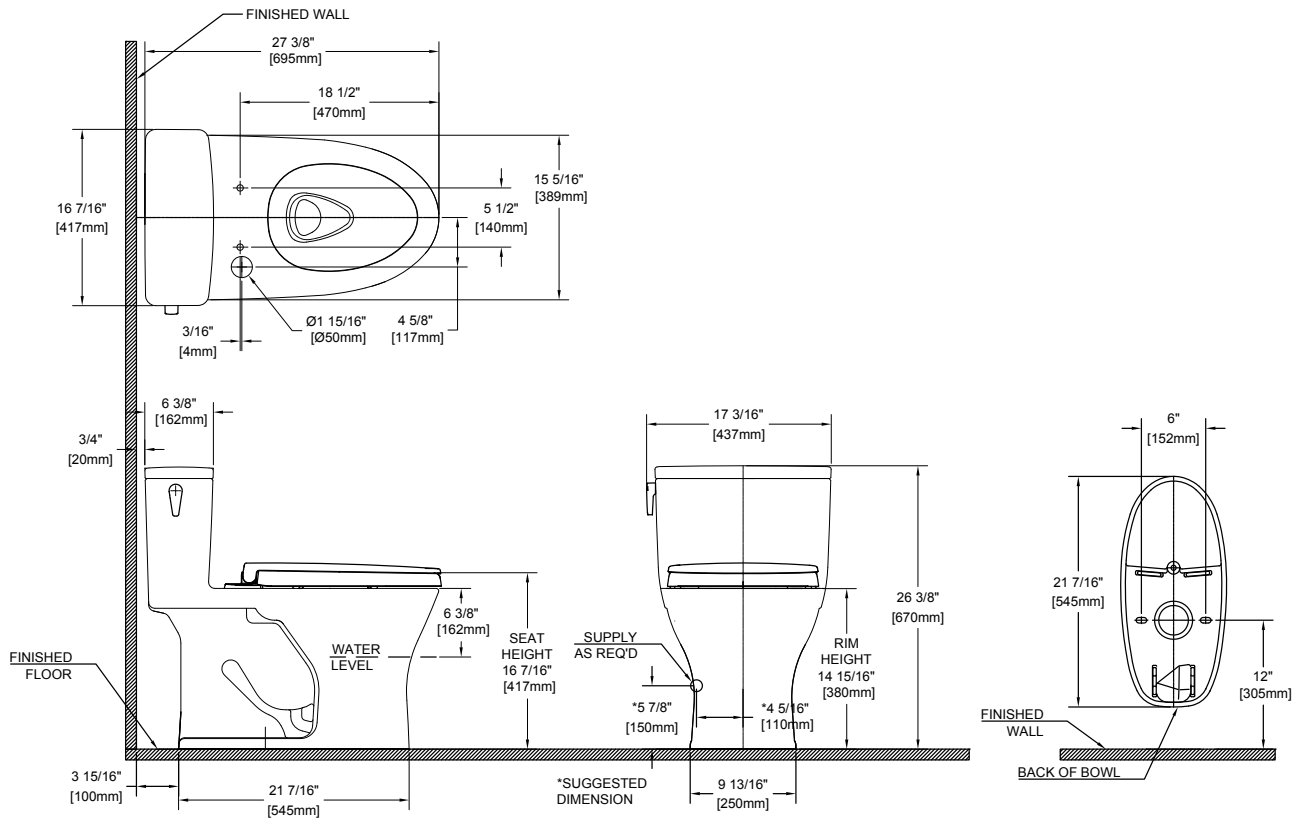

TOTO®

These dimensions and specifications are subject to change without notice