

## Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF

### FEATURES

- Wall-mounted
- Elongated front bowl
- Optional CeFiONtect™ glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating

### MODELS

- CT708U  
Commercial wall-mounted toilet with 1-1/2' top spud inlet, less seat
- CT708UG  
Commercial wall-mounted toilet with 1-1/2' top spud inlet, less seat with CeFiONtect ceramic glaze

### ADDITIONAL ITEMS

- SC534 seat
- SC134 seat
- THU111 Retro-fit mounting bolt cap set (4 pcs)

FLUSH VALVES			
ECOPOWER®		MANUAL	
Exposed		Exposed	
*TET1UA32#CP	1.0 GPF	TMT1LN32#CP	1.28 GPF
*TET1LA32#CP	1.28 GPF	TMT1NNC-32	1.6 GPF
TET1GA32#CP	1.6 GPF		
Exposed 24" Breaker			
*TET6UA32#CP	1.0 GPF		
*TET6LA32#CP	1.28 GPF		
TET6GA32#CP	1.6 GPF		
Concealed 14" x 12"			
*TET2UA32#CP	1.0 GPF		
*TET2LA32#SS	1.28 GPF		
TET2GA32#SS	1.6 GPF		
Concealed 4" x 4"			
*TET3UA32#SS	1.0 GPF		
*TET3LA32#SS	1.28 GPF		
TET3GA32#SS	1.6 GPF		

\*WaterSense listed



Flush valve sold separately



### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The wall-mounted, low consumption siphon jet flushing toilet shall be 1.0, 1.28, or 1.6 GPF (3.8, 4.8, or 6.0 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CeFiONtect ceramic glaze. Toilet can be mounted at ADA height. Toilet shall be TOTO Model CT708U\_\_\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



To complete a WaterSense listed combination, the bowl must be paired with a flush valve which is EPA WaterSense listed.

# CT708U(G)

## Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF


### SPECIFICATIONS

<b>Water Use</b>	1.0/1.28/1.6 GPF (3.8/4.8/6.0 LPF)
<b>Flush System</b>	Siphon Jet Flushing Action
<b>Water Surface</b>	12" x 9-1/4"
<b>Water Pressure</b>	Min: 35 psi (Flowing) Max: 80 psi (Static)
<b>Min. Flow Rate</b>	24 GPM
<b>Trap Diameter</b>	2-1/8"
<b>Trap Seal</b>	2-5/8"
<b>Material</b>	Vitreous China
<b>Warranty</b>	One Year Limited Warranty
<b>Shipping Weight</b>	56 lbs
<b>Shipping Dimensions</b>	26-1/4" L x 15-5/8" W x 16" H

### INSTALLATION NOTES

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R

### DIMENSIONS

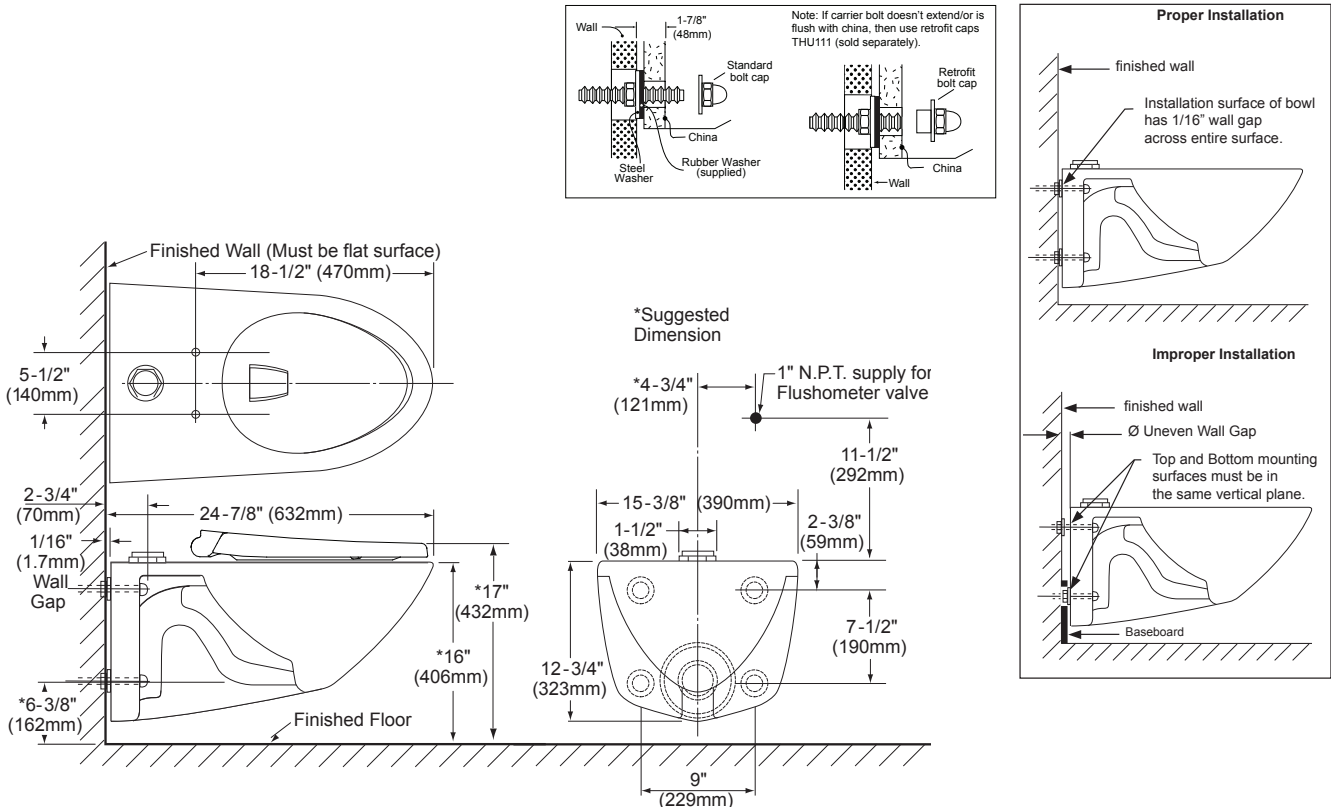

**TOTO**

These dimensions and specifications are subject to change without notice