



Product: 36 Inch Gas Range in Stainless Steel
Model Number: LRG3601U / LRG3601ULP

TECHNICAL DETAILS

Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	120V
Circuit Breaker (A)	15 or 20A
Frequency (Hz)	60 Hz

BURNER PERFORMANCE

Total Burners	6
Front Right (Single)	18,000 BTU
Front Left (Single)	18,000 BTU
Front Middle (Single)	12,000 BTU
Rear Right (Single)	9,000 BTU
Rear Left (Single)	9,000 BTU
Rear Middle (Single)	12,000 BTU
Tube Broil burner	10,000 BTU
U-shape burner (30" Oven)	18,500 BTU



FEATURES & BENEFITS

- + High-Powered BTU Burners** - The high-powered 18,000 BTU burner provides fast, intense heat for creating large family meals and restaurant-quality dishes
- + Large Oven Capacity** - 6.0 cu. ft. oven capacity can accommodate multiple dishes for enhanced cooking
- + Storage Space** - Storage drawer provides additional storage space for cooking trays and other kitchen utensils.
- + Convection Fan** - Commercial convection fan provides controlled heat distribution for fast and efficient cooking
- + Even Heat Broiler** - Reflective gas tube broiler distributes heat evenly to sear your food and seal in the juices
- + Continuous Cast-Iron Grates** - Heavy-duty continuous cast-iron cooking grates that can handle any size cookware
- + Pro-style Knobs** - Black burner control knobs add style to the bold range design
- + Porcelain Spill Tray** - Single-piece black porcelain spill tray catches the mess and makes cleanup easy
- + Porcelain Interior** - The gray porcelain oven interior adds a stylish touch and is easy to clean

ACCESSORIES (NOT INCLUDED)

Liquid Propane Gas Conversion Kit	LPKLRG3601U
Cast Iron Reversible Griddle	RG1022

WARRANTY: TWO YEAR PARTS AND LABOR





PRODUCT DIMENSIONS

Product Width	36"
Product height (from bottom to top of back splash)	36 5/16" - 37 5/16"
Product height (from bottom to top of side panel)	35 5/8" - 36 5/8"
Product depth (from back panel to bullnose)	28 5/16"
Product depth (from back panel to control board)	27 1/16"
Product depth (from back panel to side panel front)	24 3/4"
Depth of control panel (minimum)	2 1/4"
Depth of control panel (bullnose)	3 9/16"
Adjustable Legs	Not to Exceed 1"

REQUIRED CUTOUT SIZE

36 1/8" x 24 3/4" x 35 5/8" (+1")

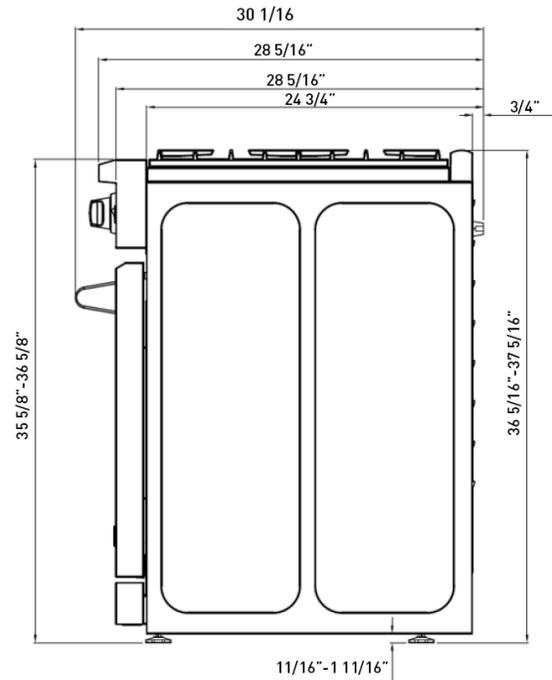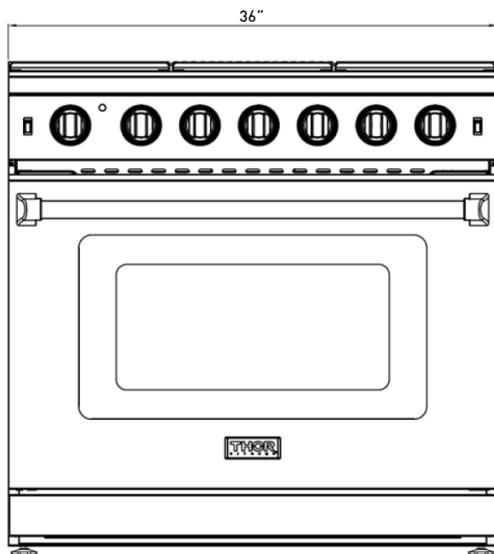

NG: Input Pressure: 7 inches,
Output Pressure: 5 inches
LP: Input Pressure: 11 inches
Output Pressure: 10 inches
Size of Regulator: 1/2 inch

