TOTO®

MS864114/MS863113

Supreme® One-Piece Toilet, 1.6GPF

FEATURES

- Power Gravity® flushing system, low consumption (1.6GPF/6.0LPF)
- One-piece decorative toilet with low-profile tank
- Elongated front bowl with SoftClose® seat (SS114) or round front bowl with SoftClose seat (SS113)
- 12" Rough-in
- Chrome trip lever

MODELS

- MS864114
 Elongated bowl with SoftClose seat (SS114)
- MS863113
 Round bowl with SoftClose seat (SS113)

COLORS/FINISHES

 Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige



PRODUCT SPECIFICATION

The one-piece Power Gravity flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be of elongated front bowl (MS864) or round front bowl (MS863) with a low-profile tank and SoftClose seat. Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS864114______ (elongated), MS863113______ (round).

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



Supreme® One-Piece Toilet, 1.6GPF

SPECIFICATIONS

Water Use
 Flush System
 Min. Water Pressure
 Water Surface
 1.6 GPF/6.0LPF
 Power Gravity®
 8 psi (static)
 10-1/4" x 8-1/4"

Trap Diameter 2-1/8"Rough-in 12"Trap Seal 2-1/4"

• Warranty One Year Limited Warranty

 Material Vitreous china
 Shipping Weight MS864114E 89 lbs. MS863113E 85 lbs.


• Shipping Dimensions 29-1/2" L x 18"W

x 19-1/4" H1 x 27-1/8" H2


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

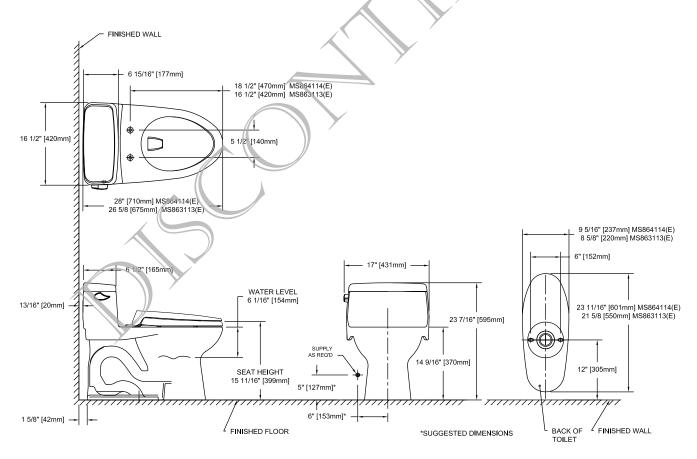

*SUGGESTED DIMENSIONS

TOTO: