

## MH® Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

### FEATURES

#### MH Bowl

- 3D TORNADO FLUSH® system, high efficiency (1.28 GPF/0.9 GPF)
- CEFIONTECT® ceramic glaze - prevents debris, mold from sticking to ceramic surfaces
- Universal Height
- D-shape front bowl

#### Slim D-Shape SoftClose® Seat

- Closed front SoftClose toilet seat and cover with quick-release hinge system for easy cleaning
- Mounting hardware included
- Made from urea-resin
- Slim design for an ultra-sleek aesthetic

#### DuoFit® In-Wall Tank

- Dual-Max® flushing system, high-efficiency (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF) Avg. flush 1.03 GPF
- Adjustable 15"-19" mounting height
- Saves up to 9" of floor space compared to standard floor-mounted toilet
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper Supply line

### KIT COMPONENTS

- CT437FG#01  
MH Wall-Hung Toilet
- WT172M#01  
In-Wall Tank System (Copper Pipe)
- SS237#01  
Slim D-Shape SoftClose Seat
- YT920#WH  
Basic Square Push Plate - White Matte

#### Available Options

- YT920#WH  
Basic Square Push Plate - White Matte
- YT920#MS  
Basic Square Push Plate - Matte Silver
- YT930#WH  
Basic Round Push Plate - White Matte
- YT930#MS  
Basic Round Push Plate - Matte Silver
- YT970#SS  
Wall Square Push Plate - Brushed Stainless Steel
- YT980#SS  
Wall Round Push Plate - Brushed Stainless Steel



**3D TORNADO FLUSH**



**D+ Dual-Max**



**CEFIONTECT**



**SD Skirted Design**

### COLORS/FINISHES

- Standard  
#01 Cotton

### CODES/STANDARDS

- Meets and exceeds:
  - Bowl: ASME A112.19.2/CSA B45.1, ASME A112.19.14
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC), EPA WaterSense State of Massachusetts, City of Los Angeles and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



# CWT437237MFG

## MH® Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

### PRODUCT SPECIFICATIONS

|                            | CT437FG                                   | SS237                                | WT172M                                    |
|----------------------------|---|--------------------------------------|---|
| <b>Water Use</b>           | 1.28 GPF & 0.9 GPF<br>(4.8 LPF & 3.4 LPF) |                                      | 1.28 GPF & 0.9 GPF<br>(4.8 LPF & 3.4 LPF) |
| <b>Flush System</b>        | Dual-Max®                                 |                                      | Dual-Max®                                 |
| <b>Min. Water Pressure</b> | 8 psi (static)                            |                                      | 8 psi (static)                            |
| <b>Water Surface</b>       | 5-1/2" X 4-1/8"                           |                                      |   |
| <b>Trap Diameter</b>       | 2-1/8"                                    |                                      |   |
| <b>Installation Height</b> | 15" to 19"                                |                                      | 15" to 19"                                |
| <b>Trap Seal</b>           | 2-1/8"                                    |                                      |   |
| <b>Warranty</b>            | One Year Limited Warranty                 | One Year Limited Warranty            | One Year Limited Warranty                 |
| <b>Material</b>            | Vitreous China                            | Urea Resin                           | Various                                   |
| <b>Shipping Weight</b>     | 68 lbs.                                   | 9 lbs., 2 oz                         | 44 lbs.                                   |
| <b>Shipping Dimensions</b> | 22" L x 14-5/8" W<br>x 16-1/2" H          | 20-1/2" L x 19-<br>1/4" W x 3-1/4" H | 47-1/2" L x 26" W<br>x 6" H               |

#### CT437FG

This universal height, high efficiency 3D TORNADO FLUSH® system toilet shall be 1.28 GPF & 0.9 GPF. Toilet shall have CEFIONTECT ceramic glaze. Toilet shall be mounted to in-wall tank system, D-shape front bowl and wall-mounted push-button type trip lever. Toilet shall be TOTO Model CT437FG#01.

#### SS237


Seat shall be made from urea-resin for both the seat and seat cover. The seat installation is top mount installation with adjustable hinge plates and stainless steel hinge caps.

#### WT172M

This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28 GPF & 0.9 GPF. Requires TOTO toilet model CT437FG. In-Wall tank system shall be TOTO Model WT172M.


### INSTALLATION NOTES

- Adequate structural bracing is required

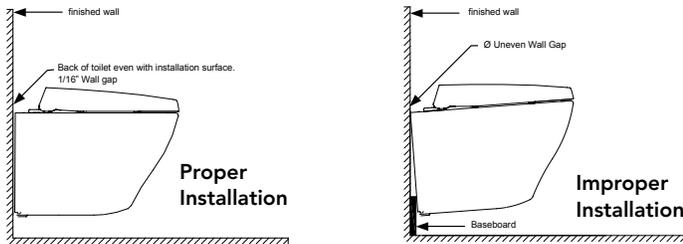


### PRODUCT DIMENSIONS

#### CT437FG

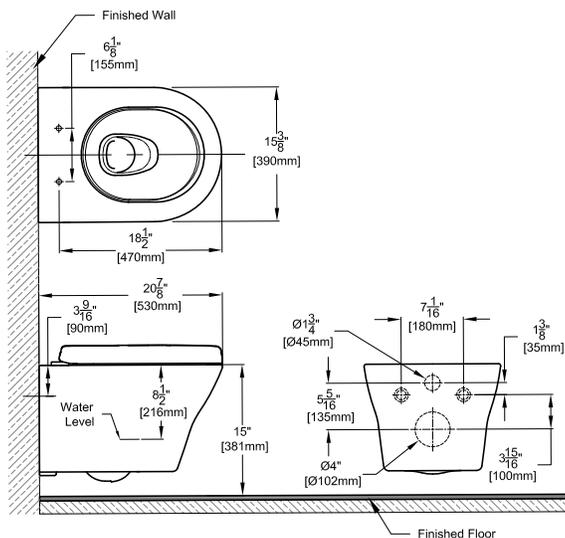


#### SS237

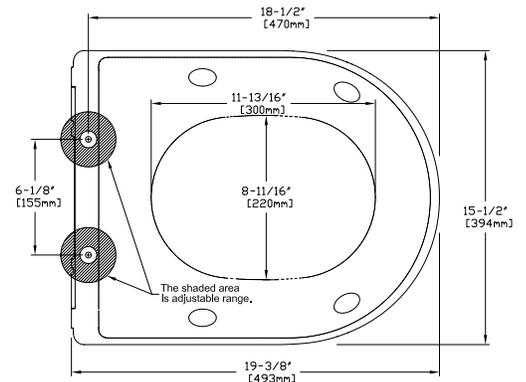

# CWT437237MFG

## MH® Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

### WT172M

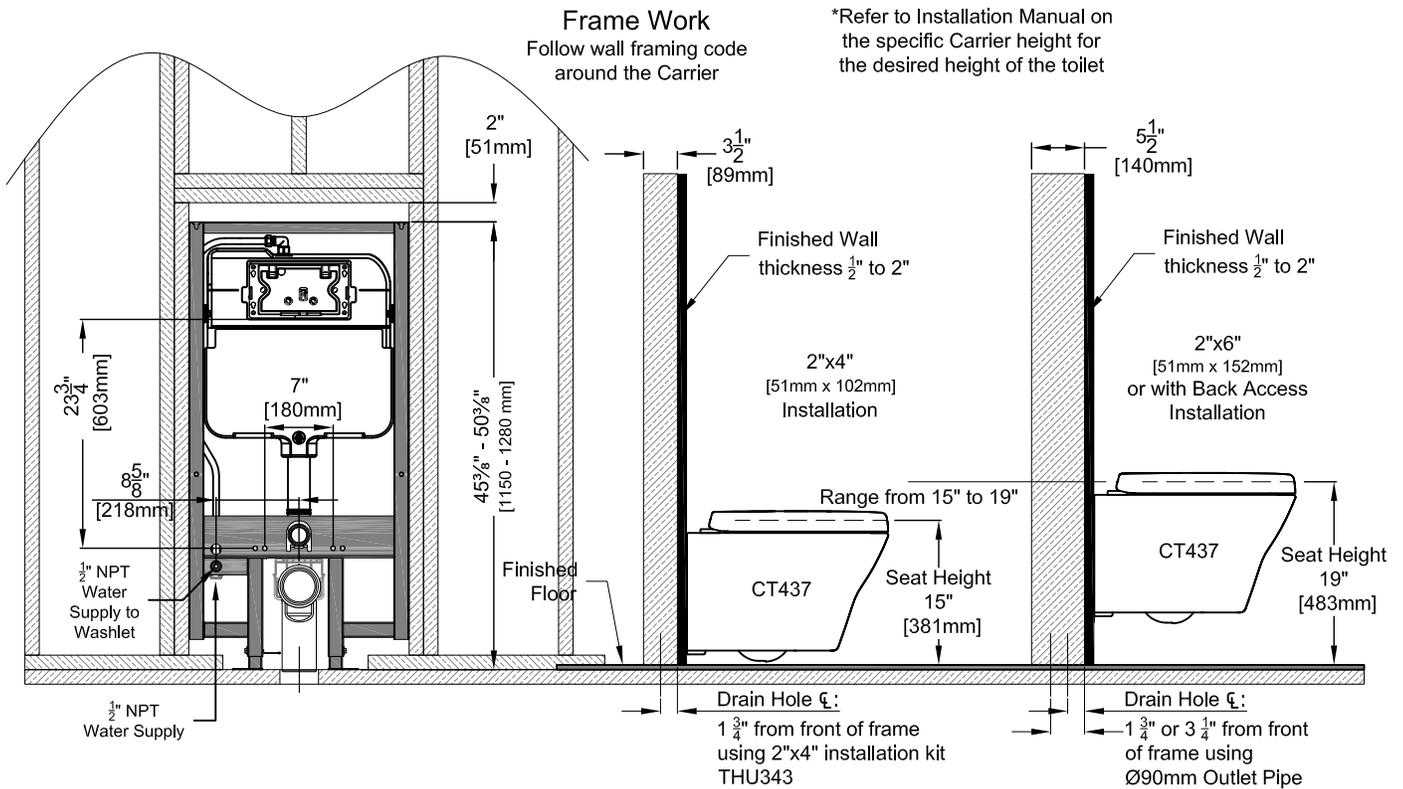

**TOTO®**

*These dimensions and specifications are subject to change without notice*