Upton™ Handshower Set

FEATURES

- Maximum flow rate of 2.5 gpm (9.5 lpm)
- 4" diameter spray face
- Multi-function handshower: Full, Massage, Mist and combo spray modes
- Rubber nozzles to prevent limescale build up
- Includes 60" metal shower hose, shower holder and shower elbow
- 1/2" NPT connection

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

OPTIONAL

TS100GR#CP 30" Slide Bar

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION

The handshower shall have maximum flow rate of 2.5 gpm (9.5 lpm). Product shall have a 4" diameter spray face. Product shall feature multi-function modes: Full, Massage, Mist Spray combo spray modes. Product shall have rubber nozzles to prevent limescale build up. Product shall Include 60" metal shower hose, shower holder and shower elbow. Product shall have 1/2" NPT connection. Product shall be TOTO Model TS630F2#



$Upton^{^{\text{\tiny{TM}}}}\ Handshower\ Set$

SPECIFICATIONS

Warranty
Lifetime Limited Warranty

(Residential Use)


One Year (Commercial Use)

Shipping Weight 4.4 lbs.

• Shipping Dimensions 11"L x 12-3/8"W x


3-5/8"H

Maximum Flow Rate 2.5 gpm (9.51 lpm)



INSTALLATION NOTES

Optional Accessories: TS100GR Slide Bar sold separately.

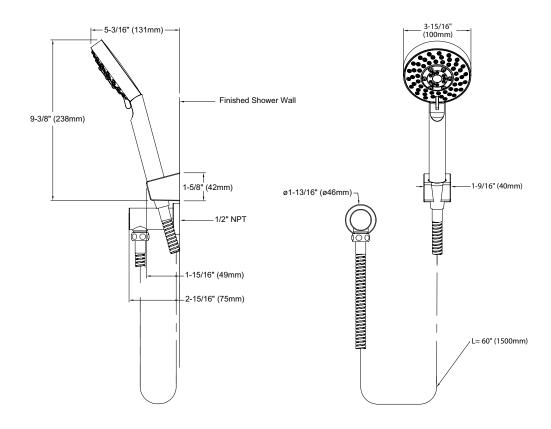



These dimensions and specifications are subject to change without notice