

## Touchless Soap Dispenser - Square Vessel with Subtank

### FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounting hardware and supply lines
- Chrome plated
- Single-hole mount
- TOTO Soap required
- Refillable tank system
- ADA compliant

### COLORS/FINISHES

- #CP Polished Chrome

### OPTIONAL ACCESSORIES

- THP3140#CP  
Escutcheon 1-1/8" ~1 -1/2" (28 mm~38 mm)
- THP3374  
Mounting bracket for tank

### MODELS

- TES204AG#CP (2 Spouts)  
TLK08003G#CP (Spout x 2 pcs)  
TLK01106U (Controller & Reservoir)  
TLK01401U (5.3 gal/20L Subtank)
- TES205AG#CP (3 Spouts)  
TLK08003G#CP (Spout x 3 pcs)  
TLK01107UA (Controller & Reservoir)  
TLK01401U (5.3 gal/20L Subtank)



### Auto Functions

### PRODUCT SPECIFICATION

TOTO Model # \_\_\_\_\_ Product shall be automatic infrared sensor activated. Product shall have automatic sensor adjustment upon installation. Soap dispenser, controller w/ reservoir, and subtank will be sold separately. Product shall have a controller pump with 0.8 gallon (3L) reservoir. Product shall have a 5.3 gallon (20L) subtank.

### CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC
- ADA Compliant
- Compliance with CA Prop 65 warning requirements



### COMPONENT BREAKDOWN

Soap Dispenser Specification Details

Step 1: Choose quantity of spouts desired

Step 2: Select kit or by individual component quantities

KIT OPTIONS		COMPONENTS					
Kit Model #	Spout Installation	SPOUT		CONTROLLER & RESERVOIR		SUBTANK	
		Model #	Quantity	Model #	Quantity	Model #	Quantity
TES204AG#CP	2	TLK08003G#CP	2	TLK01106U	1 (For 2 Spouts)	TLK1401U	1
TES205AG#CP	3	TLK08003G#CP	3	TLK01107UA	1 (For 3 Spouts)	TLK1401U	1

# TES20(4/5)AG Series

## Touchless Soap Dispenser - Square Vessel with Subtank

### SPECIFICATIONS

<b>Power Supply</b>	AC 120V
<b>Wattage</b>	(TLK01106U) 6.5W (TLK01107UA) 9W
<b>Sensor Detection Range</b>	5-1/8" ~ 7-7/8" (130 ~ 200 mm) Sensor is self-adjusting
<b>Ambient Temperature</b>	34-104°F (1-40°C)
<b>Humidity</b>	Max. 90% RH
<b>Power Cord Length</b>	55" (1.4 m)
<b>Soap Output Volume</b>	0.04 oz (factory setting)
<b>Tank Capacity</b>	Approximately 0.8 gal (3L) Tank Approximately 5.3 gal (20L) Subtank
<b>Warranty</b>	*Three Year Warranty

\* Failure to use TOTO soap will void warranty

### INSTALLATION NOTES


- Spout Mounting Hole  $\phi 1"$  ~  $\phi 1\text{-}1/8"$  ( $\phi 25$  ~  $\phi 28$  mm)
- Deck Thickness  $1/4"$  ~  $1\text{-}1/8"$  (5 ~ 30 mm)

### TOTO SOAP *(Sold Separately)*

SKU No.	Quantity	Packaging	Notes
TSFG1	4 gal.	Package of 4, 1 gal. each	Antimicrobial Soap (Fresh)
TSFG55	55 gal.	Package of 1, 55 gal. each	Antimicrobial Soap (Fresh)
TSFB1-GS	4 gal.	Package of 4, 1 gal. each	TOTO Foam Soap Green Seal™ (Lilac)



### DIMENSIONS

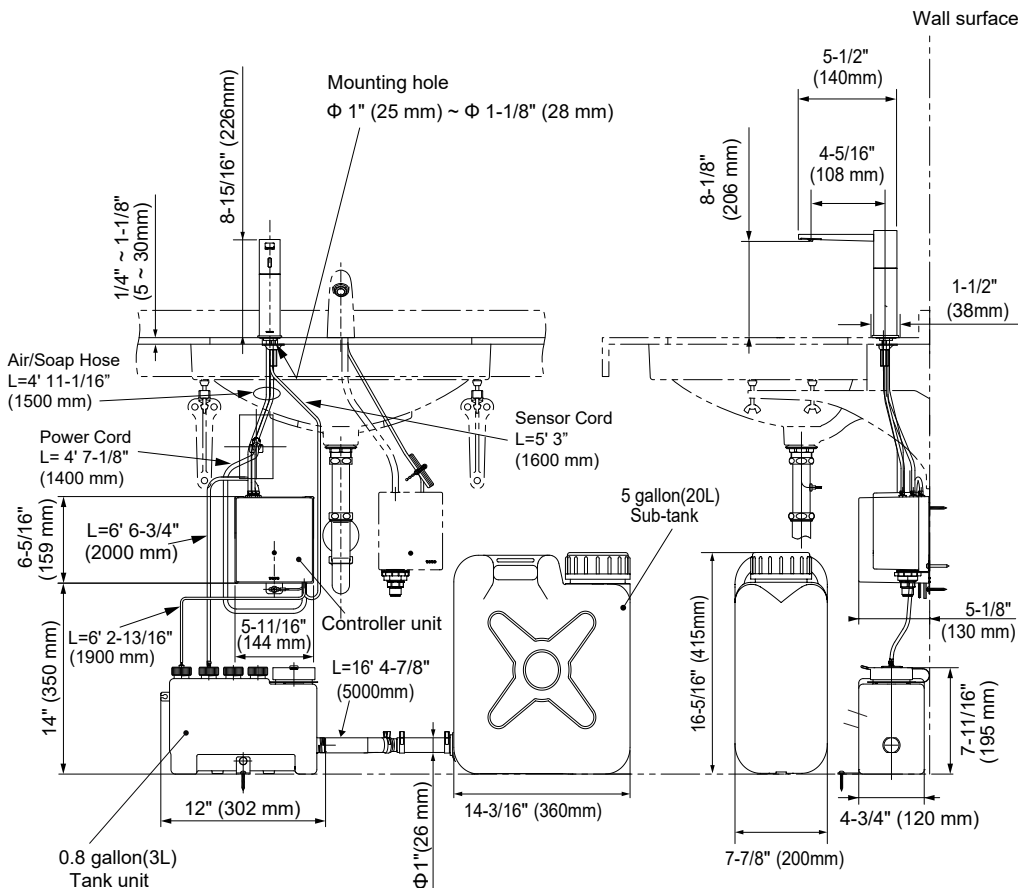

**TOTO®**

*These dimensions and specifications are subject to change without notice*