

MiniUnit™ Universal Rough-In Box

FEATURES

- Universal rough-in to allow easy customization of valves and trims without removing walls
- Corrosion resistant solid brass valve body
- Intuitive 360 degree box design to minimize installation error
- 1" tolerance adjustable to thinner or thicker walls
- Compact body measured at 4.4" diameter and weighted 1.6lbs for an effortless installation
- **Requires volume control valve or positive shut off valve**

COMPATIBLE TRIMS & VALVES

- TBV01406U
- TBV01407U
- TBV01408U
- TBV02401U
- TBV02403U
- TBV02404U
- TBV02405U
- TBV02406U



CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION

MiniUnit universal rough-in shall have corrosion resistant solid brass body. Product shall be approximately 4.4" in diameter and 1.6lbs in weight. Product shall have 1" adjustability for easier installation.

TBN01001U

MiniUnit™ Universal Rough-In

SPECIFICATIONS


Material	Brass
Warranty	Limited Lifetime (Residential Use) One Year (Commercial Use)
Shipping Weight	3 lbs
Shipping Dimensions	11-3/4" x 7-3/4" x 6-3/4"

INSTALLATION NOTES


Requires volume control valve or positive shut off valves and trims (sold separately- refer to Compatible Trims and Valves Section).

DIMENSIONS

Front view

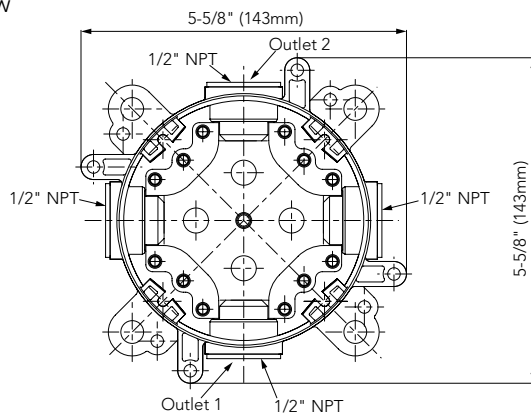

Side view

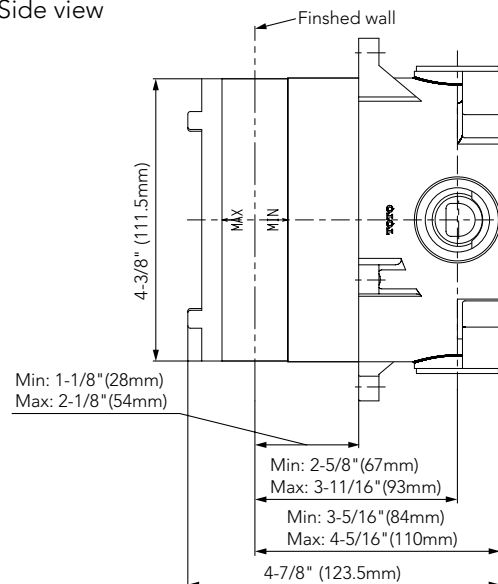

TOTO

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

These dimensions and specifications are subject to change without notice

#SS-01310 v.01