HBV515 • 15" Beverage Center • 5 Class





Key Features

- Industry Exclusive: Full-depth lower interior maximizes ٠ storage options
- Industry Leading: Variable speed compressor delivers ٠ maximum energy efficiency, faster temperature response, and quieter operation
- Stainless steel interior ۰
- Stainless steel cabinet, toe kick, and accents •
- U-Adjust[™] Interior: 19 adjustable positions ٠
- Two removable, full-extension Slide & Secure™ Bins
- Two removable, full-extension wine racks
- Convection cooling system provides a quick cool down and consistent temperature
- Temperature range: 33°F 70°F

MODEL DETAILS



Stainless Frame

Additional Options

- Accessory panels are designed for easy installation on Integrated models
- Stainless lock model available



Integrated Frame



Integrated Solid



Stainless Handleless Panel

Stainless Lock Model

• Adjustable bright white or blue LED lighting

- Soft close door with articulating hinge
- Volume of 2.9 cu ft holds up to 8 wine bottles (750 ml) and 34 bottles (12 oz) or 54 cans (12 oz)
- Digital touch pad control with blue LED display ٠
- Stainless steel handle (7/8" diameter)
- Integrated model requires 3/4" custom door panel and handle (not supplied by U-Line)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHBV515-SG01A	115 / 60	Field Reversible	Stainless Frame	105 lb
UHBV515-SG41A	115 / 60	Right-Hand Hinged	Stainless Frame (with lock)	105 lb
UHBV515-SG51A	115 / 60	Left-Hand Hinged	Stainless Frame (with lock)	105 lb
UHBV515-IG01A	115 / 60	Field Reversible	Integrated Frame	103 lb
UHBV515-IS01A	115 / 60	Field Reversible	Integrated Solid	88 lb

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULAGRILLE15	Adjustable Grille (Accepts Integrated Panel)	Black	1.5 lb
ULASHP15FRAME*	Stainless Handleless Panel Frame	Stainless	5 lb
ULASHP15SOLID*	Stainless Handleless Panel Solid	Stainless	6 lb

*Installs on integrated models.


HBV515 • 15" Beverage Center • 5 Class





Side

*Add 1/2" for Integrated models

Тор

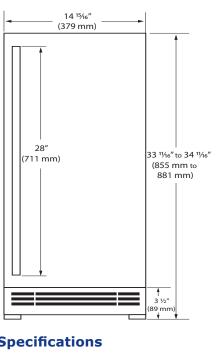

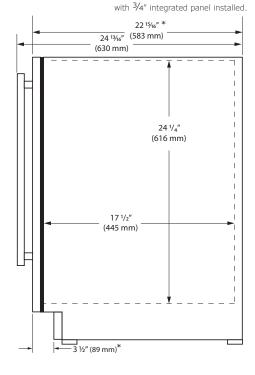



Specifications

Model	HBV515
Amps: Running	1.2
Capacity: Bottle (12 oz)	34
Capacity: Can (12 oz)	54
Capacity: Volume (cu ft)	2.9
Capacity: Wine Bottle (750 ml)	8
Dimensions: Product Depth	22 ¹⁵ /16" / 583 mm
Dimensions: Product Height (Min.)	33 ¹¹ / ₁₆ " / 855 mm
Dimensions: Product Width	14 ¹⁵ / ₁₆ " / 379 mm
Energy Consumption: Avg. Per Year	255 - 285 kWh
ENERGY STAR (glass door)	No
ENERGY STAR (solid door)	Yes
Panel Height	30" / 762 mm
Panel Thickness	³ ⁄4″ / 20 mm
Panel Type	2 34" / 70 mm Frame Panel or Solid Panel
Panel Width	14 ¹⁵ / ₁₆ " / 379 mm
Product Weight: Max	105 lb
Refrigerant Type:	R600a
Sabbath (Star K Certified)	Yes
Temperature Range	33°F - 70°F

Warranty

2 Year (parts & labor) / 5 year sealed system (parts) •


Additional 1 Year (parts & labor) warranty at + no cost with product registration

See complete warranty for details

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

7 ¾″ (187 mm) Power Cord 6 ft (183 cm) 1 ¾″ (35 mm)

Cabinet Cut-Out



Installation Notes

- 15" Cutout width may be sufficient if opening is exact and square
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow



8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • sales@u-line.com • u-line.com

