







Stainless Solid

Integrated Solid

## **Key Features**

- Convection cooling system provides a quick cool down and consistent temperature
- Converts to a refrigerator with the touch of a button
- White interior
- Three full-extension chrome plated slide-out baskets
- Stainless steel full-wrap door and handle (7/8" diameter)
- Stainless steel grille (stainless model), black metal grille (integrated model)
- Digital touch pad control

- Refrigerator temperature range: 34°F to 45°F
- Freezer temperature range: -5°F to 5°F
- Bright white LED lighting
- Volume of 4.8 cu ft
- Field reversible door is shipped right-hand hinged
- Integrated model requires 3/4" custom door panel and handle (not supplied by U-Line)
- Built-in or freestanding
- Four adjustable leveling legs

# **Model Details**

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHFZ124-SS01B	115 / 60	Field Reversible	Stainless Solid	125 lb
UHFZ124-IS01B	115 / 60	Field Reversible	Integrated Solid	122 lb

# Accessories


Model	Description	Finish	Shipping Weight
ULAFREESTANDB	Freestanding Kit	Black	3 lb


# HFZ124 • 24" Convertible Freezer • 1 Class

#### Front

## Side



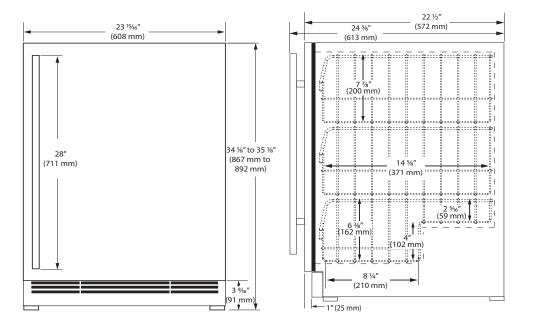





#### **Specifications**

Model	HFZ124			
Amps: Running (115 v)	2.5 A			
Capacity: Total Volume (cu ft)	4.8 cu ft			
Dimensions: Product Depth	22 ¼2" / 572 mm			
Dimensions: Product Height	34 ¼8" / 867 mm			
Dimensions: Product Width	23 <sup>15</sup> / <sub>16</sub> " / 608 mm			
ENERGY STAR	Tier 1			
Energy Consumption: Avg. Per Year	390 kWh			
Panel Height	30 ¼4" / 768 mm			
Panel Thickness	<sup>3</sup> /4" / 20 mm			
Panel Type	Solid Panel			
Panel Width	23 ¾" / 603 mm			
Refrigerant Type	R600a			
Sabbath (Star K Certified)	Yes			
Temperature Range	-5°F to 5°F / 34°F to 45°F			

Back



# **Cabinet Cut-Out**



#### Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



#### **Installation Notes**

- 24" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • sales@u-line.com • u-line.com