





Stainless Solid

# **Key Features**

- Industry Exclusive: U-Choose<sup>™</sup> feature offers five levels of ice density
- Industry Leading: Produces up to 90 lb of ice per day
- Industry Leading: Stores 30 lb of ice
- Eco friendly most efficient type of specialty ice
- Makes cylindrical compressed ice bits approx. 3/4" L x 1/2" H
- Digital touch pad control with blue LED display
- Indicator alert notifies user when cleaning is needed
- Bright white LED lighting

- White interior
- Stainless steel cabinet, toe-kick, and full-wrap door
- Stainless steel handle (7/8" diameter)
- Easiest nugget ice machine cleaning process in the industry
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs
- Factory installed drain pump model recommended if a gravity drain is not accessible

### **Model Details**


Model	Voltage/Hz	Door Swing	Pump	Finish	Shipping Weight
UONB115-SS01B	115 / 60	Field Reversible	-	Stainless Solid	96 lb
UONP115-SS01B	115 / 60	Field Reversible	Pump Included	Stainless Solid	101 lb


### Accessories

Model	Description	Finish	Shipping Weight
ULANUGGETCLEAN	Nugget Ice Cleaner (Single 8 oz. bottle)	N/A	1 lb
ULAWATERHOOKUP	Braided Water Supply Line Kit	N/A	2 lb

# 28" (711 mm) 34" to 35" (863 mm to 889 mm)

**Front** 

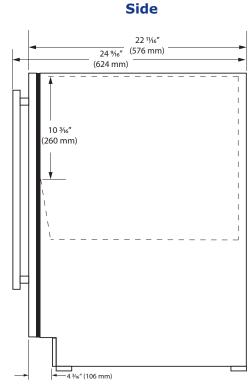

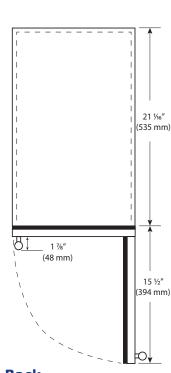


Top

# **Specifications**

Model	ONB115
Amps: Running	3
Dimensions: Product Depth	22 <sup>11</sup> / <sub>16</sub> " / 576 mm
Dimensions: Product Height	34" / 863 mm
Dimensions: Product Width	14 <sup>15</sup> / <sub>16</sub> " / 379 mm
ENERGY STAR	Yes
Ice Production Per Day	90 lb
Ice Storage	30 lb
Product Weight: Max	101 lb
Refrigerant Type:	R600a
Sabbath (Star K Certified)	Yes

# 7 ½" (191 mm) Drain 7 ½" (191 mm) Power Cord 6 ft (183 cm) 2" (51 mm)

### **Cabinet Cut-Out**



### Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



### **Installation Notes**

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow









Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.