


ASSEMBLY INSTRUCTIONS

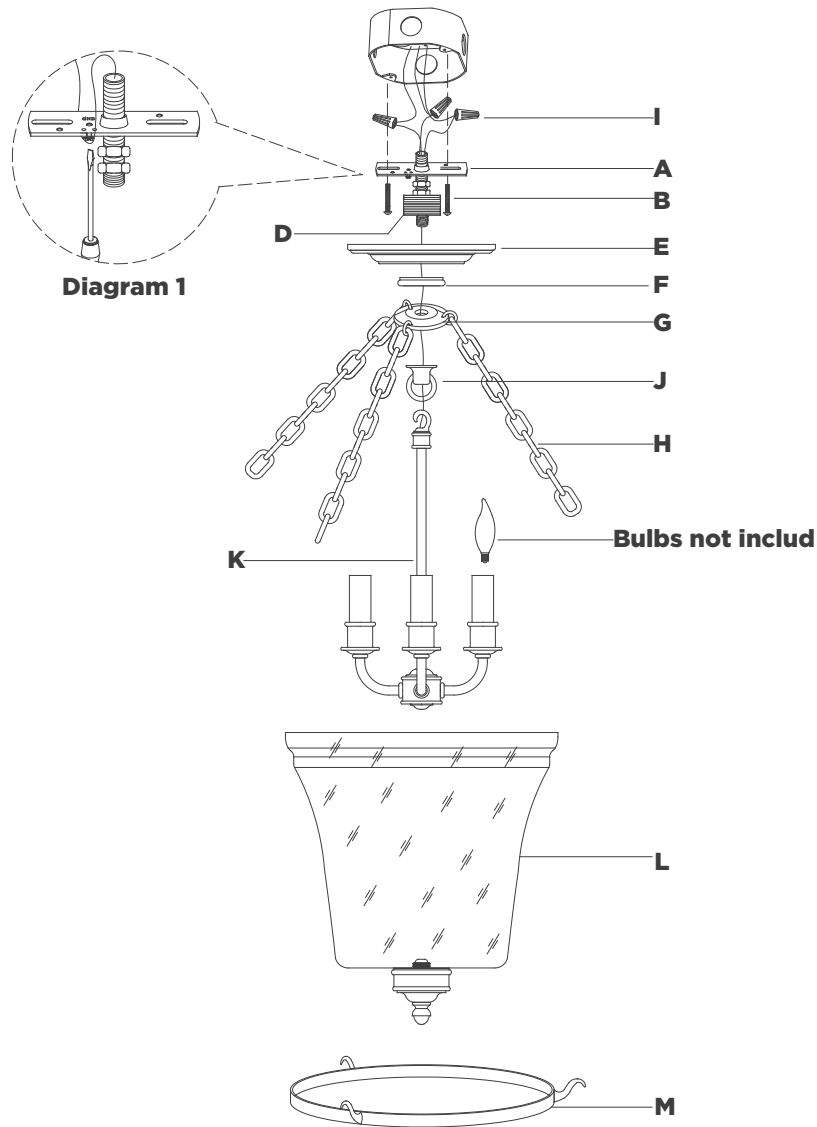

Sussex Semi-Flush Bell Jar Lantern

Item # CHC2209

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Unscrewing fixture loop (**J**) from collar (**D**), then removing canopy (**E**) from collar (**D**) by removing collar ring (**F**).
3. Feed fixture wires through fixture loop (**J**), plate (**G**), collar ring (**F**) and canopy (**E**).

NOTE: When you reach the collar (**D**), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.

4. Separate two sides of molded wire, and strip insulation on each 5/8".
5. Twist all fixture wires together, and slip through center hole of collar (**D**).

NOTE: Untwist wires and separate to prepare for connection.

6. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (**A**).

NOTE: It is imperative that the fixture is grounded.


7. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (**A**).
8. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (**A**).

CAUTION: Do not reverse the hot and neutral connections.

VISUAL COMFORT & Co.



ASSEMBLY INSTRUCTIONS

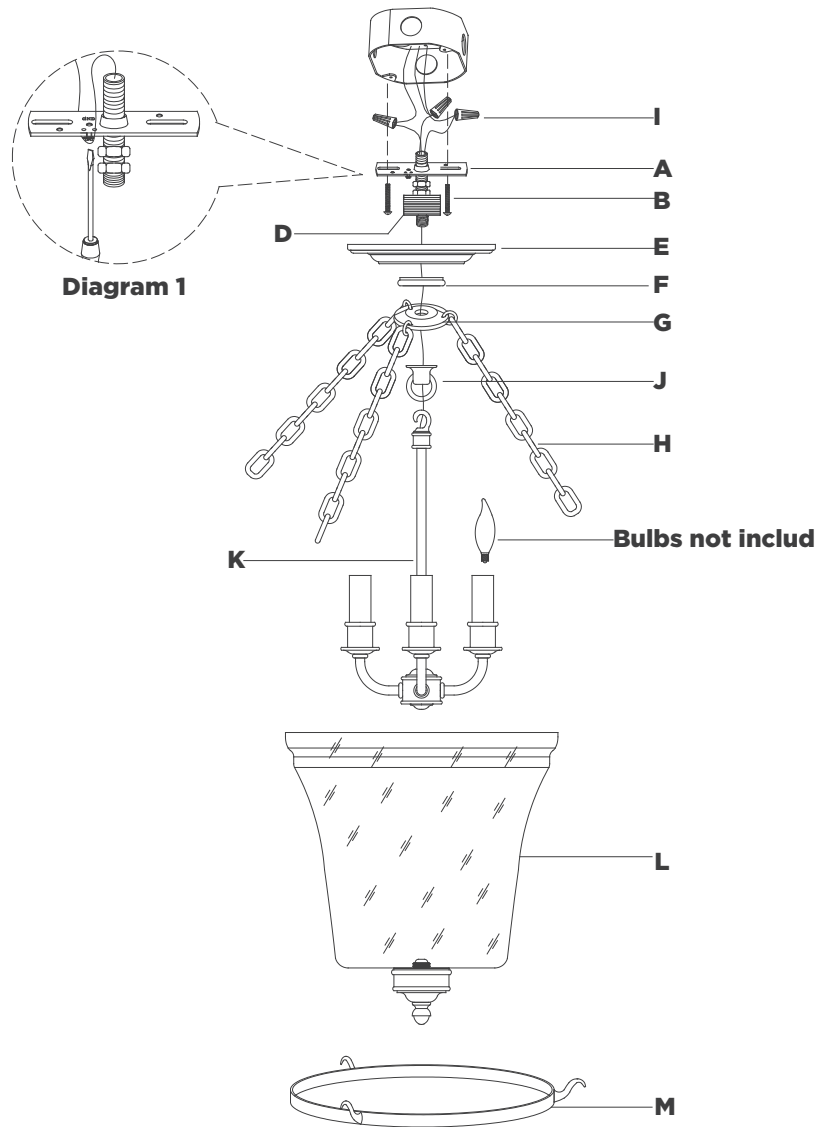

Sussex Semi-Flush Bell Jar Lantern

Item # CHC2209

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

9. Make sure all wire connections are tight, then carefully tuck into the junction box.
10. Install mounting plate **(A)** to the junction box and secure with mounting screws **(B)**.
11. Install canopy **(E)** to collar **(D)** and secure with collar ring **(F)**.
12. Install plate **(G)** to collar **(D)** and secure with fixture loop **(J)**, then hang fixture cluster **(K)** to fixture loop **(J)**.
13. Install light bulbs into the sockets.
14. Place glass **(L)** to fixture frame **(M)**, then hang fixture frame **(M)** to chains **(H)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.