


ASSEMBLY INSTRUCTIONS

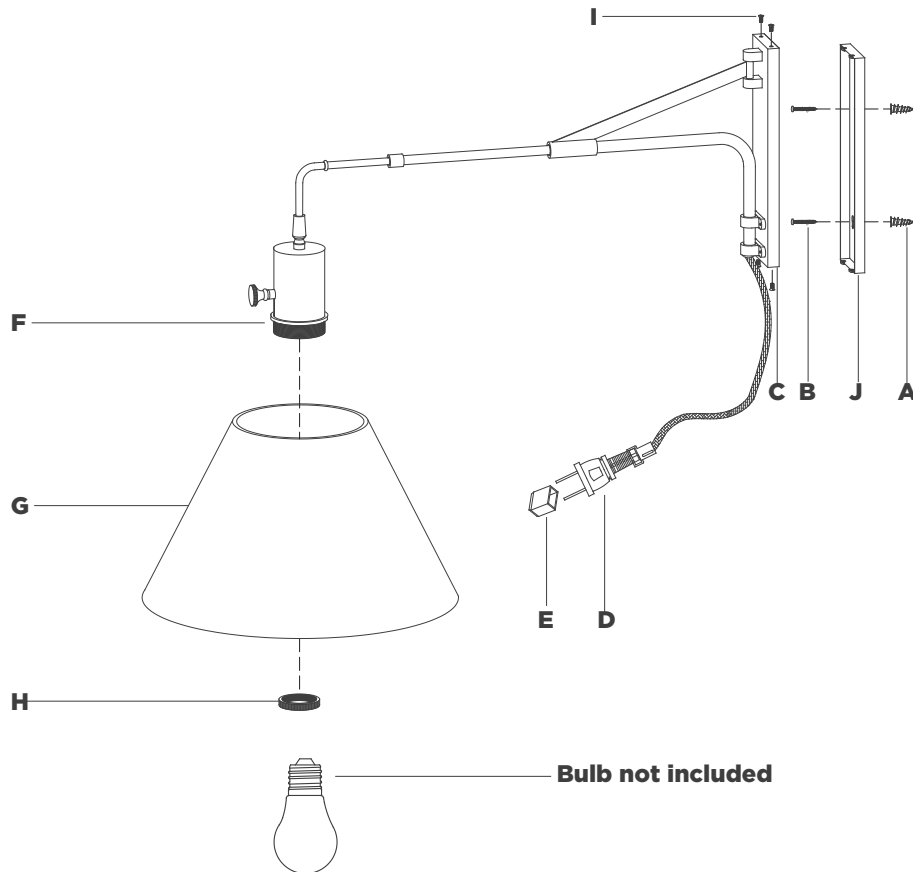

Brompton Extension Swing Arm

Item # RL2500

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Hammer
Pencil	Drill	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (J) from fixture (C) by removing screws (I).
3. Using portable mounting plate (J) as a guide, line up with the wall and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using a hammer.
5. Secure wood screws (B) to anchors (A), leaving 1/8" of exposed thread in order to hang fixture.
6. Install mounting plate (J) to fixture (C) by securing with screws (I).
7. Hang fixture (C) to wood screws (B).
8. Remove socket ring (H) from socket cup (F).
9. Remove shade (G) from packaging and install to socket cup (F) using socket ring (H).
10. Install light bulb into the socket.
11. Remove protective cover (E) from plug (D).
12. Plug into electrical outlet and test the fixture.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.