


ASSEMBLY INSTRUCTIONS

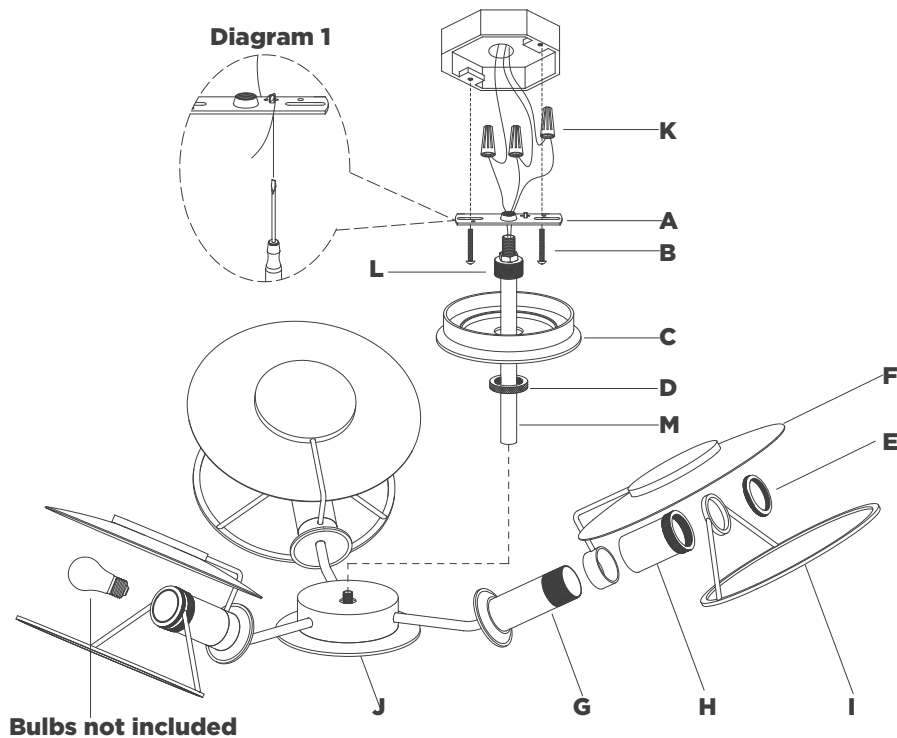

Osiris Medium Reflector Semi-Flush Mount

Item # TOB4290

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Feed fixture wires through rod (M), collar ring (D) and canopy (C).
3. Thread rod (M) onto fixture body (J).
4. Thread mounting plate (A) to collar loop (L).
5. Install mounting plate (A) to junction box and secure with mounting screws (B).
6. Cut excess wires, being sure to leave enough to reach the junction
7. box. Separate wires, and strip insulation on each 5/8".
8. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (K).

NOTE: It is imperative that the fixture is grounded.

9. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut (K).
10. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut (K).

CAUTION: Do not reverse the hot and neutral connections.

ASSEMBLY INSTRUCTIONS

Osiris Medium Reflector Semi-Flush Mount

Item # TOB4290

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Install canopy **(C)** to mounting plate **(A)** and secure with collar ring **(D)**.
12. Remove socket tubes **(H)** from sockets **(G)**, then install reflectors **(F)** to sockets **(G)** and secure with socket tubes **(H)**.
13. Remove socket rings **(E)** from socket tubes **(H)**, then install shade **(I)** to socket tubes **(H)** and secure with socket ring **(E)**.
14. Install light bulbs into the sockets.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

