


## ASSEMBLY INSTRUCTIONS

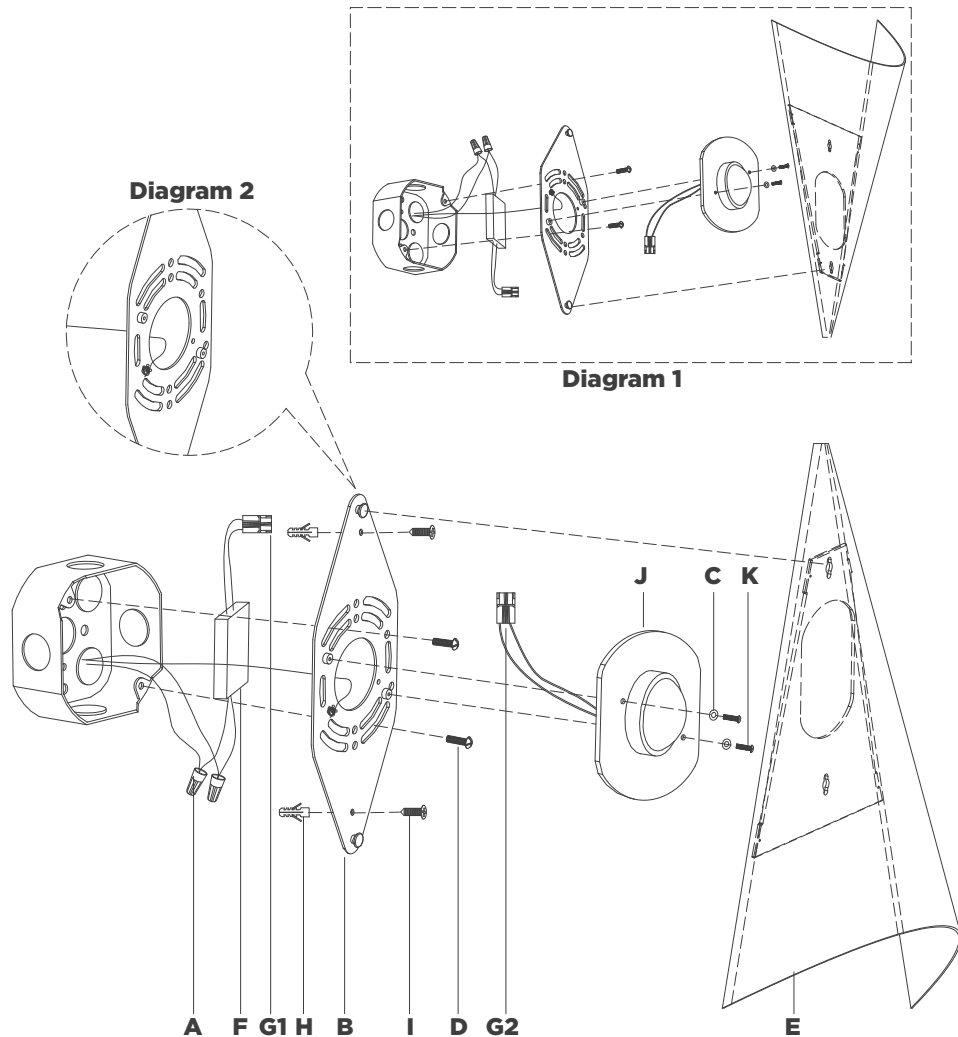

## Piel 20" Indoor/Outdoor Wall Wash

Item # KW2636

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

|                      |                     |        |
|----------------------|---------------------|--------|
| Phillips Screwdriver | Slotted Screwdriver | Hammer |
| Pencil               | Drill               |        |

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove fixture (J) from mounting plate (B) by removing rubber washers (C) and screws (K).
3. Using mounting plate (B) as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (H) into the holes using a hammer.
5. Connect driver (F) input neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
6. Connect driver (F) input hot wire (black) to the supply hot wire (usually black) using wire nut (A).

**CAUTION:** Do not reverse the hot and neutral connections.

7. Insert driver (F) into junction box.


**NOTE:** Mounting plate can be installed inverted (see diagram 1).

8. Install mounting plate (B) to junction box and secure with mounting screws (D), then secure wood screws (I) to anchors (H).
9. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2).

Tighten.

**NOTE:** It is imperative that the fixture is grounded.

## ASSEMBLY INSTRUCTIONS

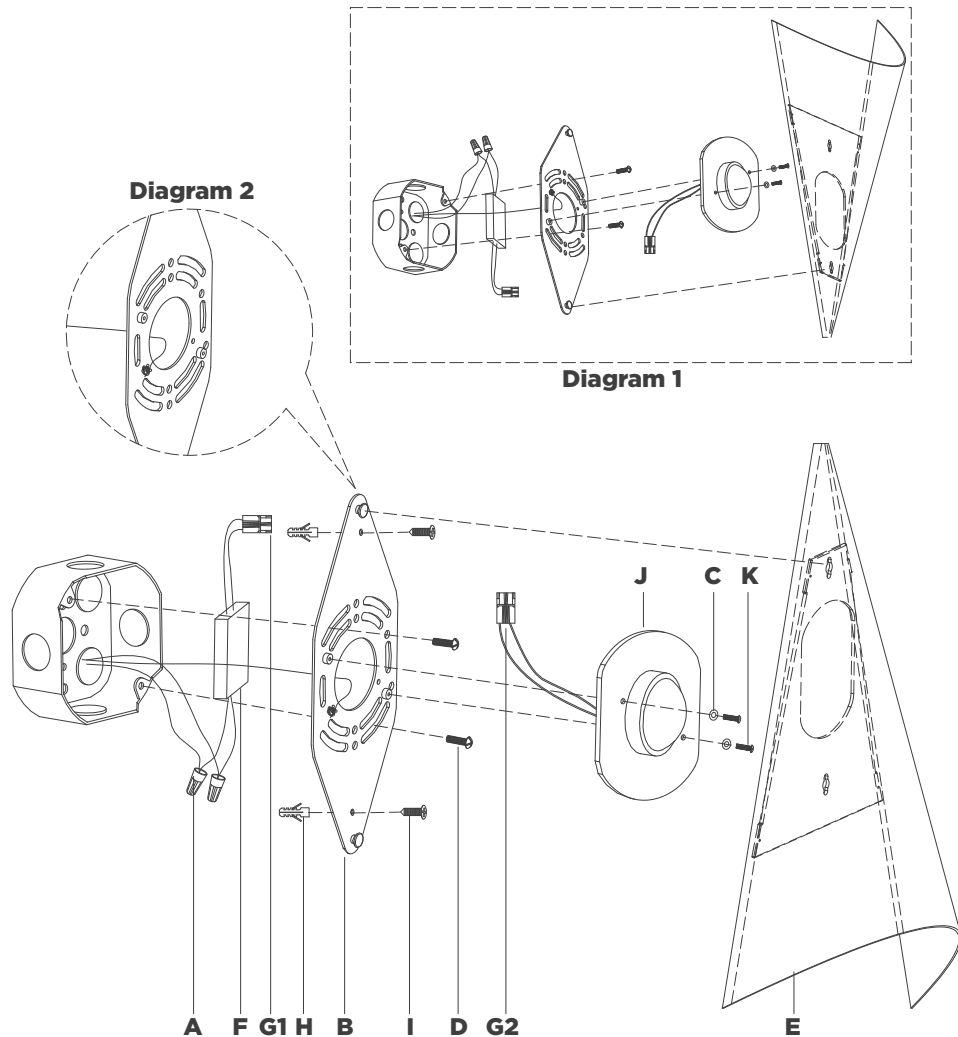

## Piel 20" Indoor/Outdoor Wall Wash

Item # KW2636

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Connect quick connector **(G1 & G2)** together.
11. Install fixture **(J)** to mounting plate **(B)** and secure with rubber washers **(C)** and screws **(K)**.
12. Hang shade **(E)** to fixture **(B)**.

### FOR OUTDOOR/WET LOCATION INSTALLATION:

13. Using silicone compound, apply a small bead where backplate meets the wall to prevent water from entering.

**NOTE:** Large gaps will need to be corrected before applying silicone compound.

**CARE INSTRUCTIONS:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.