

# Apero 240/208V

## Convector




White (-BB)




Charcoal (-HS)

With a classic design and concentrated power in a single height, the Apero offers Convectair's signature comfort at an affordable price.



1



2



3



### Features

#### Color

- Standard: white.
- Some models are also available in charcoal color.

#### Finish

- Standard: epoxy/polyester anti-rust powder coating resistant to UV rays.

#### Voltage

- 240/208V, 60 Hz, 1-phase.

#### Construction

- Steel cabinet featuring rounded corners and grilles that prevent access to the heating element.
- Front air outlet that directs warm air towards the centre of the room. **1**
- High-limit temperature control with automatic reset.

#### Heating element

- X-shaped, monoblock element made of surface-treated extruded aluminum. **2**

#### Control

- Built-in electronic proportional-action digital thermostat, ultra-precise to 1/10 °C (1/5 °F), located at the top of the unit. **3**
- Digital controls lockable by key combination.
- Temperature display format (°C or °F).
- "Mode" button to choose from Comfort, Economy, Frost Protection and Heat Off modes.
- Heating indicator light.
- "On-Off" button.

#### Installation

- Quick surface-mounted installation, with the included wall mounting bracket, that also serves as marking template.
- Flexible cable with electrical wall box cover plate included.
- Requires installation of a wall electrical box not supplied.


#### Warranty

- 2-year warranty against defects.
- 5-year warranty on the heating element.

#### Application

- Kitchen, living room, family room, bedroom, bay window.

Recommended installation height		Minimum clearances							
		Front		Sides		Above		Below	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
4	102	20	508	6	152	4	102	4	102

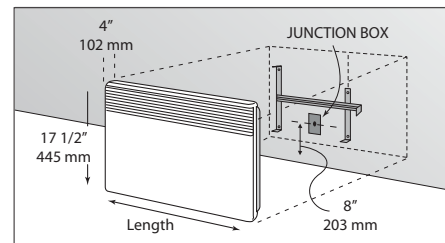

Note: The depth shown includes wall bracket.

Models

Product # White	Price	Product # Charcoal	Price	Volts	Watts	Length		Weight	
						in.	mm	lb	kg
7359-C05-BB	285.00	-	-	240/208	500/375	13 3/8	340	6.9	3.1
7359-C07-BB	329.00	7359-C07-HS	347.00	240/208	750/563	13 3/8	340	7.2	3.3
7359-C10-BB	358.00	7359-C10-HS	373.00	240/208	1000/750	16 9/16	420	8.1	3.7
7359-C12-BB	384.00	-	-	240/208	1250/938	19 11/16	500	9.1	4.1
7359-C15-BB	406.00	7359-C15-HS	424.00	240/208	1500/1125	22 13/16	580	10.7	4.8
7359-C17-BB	417.00	-	-	240/208	1750/1313	26	660	11.7	5.3
7359-C20-BB	439.00	7359-C20-HS	468.00	240/208	2000/1500	29 1/8	740	13.1	5.9

