




## Toilet seat Subway

<b>Model</b>	9M82U1 Subway toilet seat with Soft Closing and Quick Release, incl. hinge 9221 22 61
<b>Product Description</b>	<p>Subway toilet seat in Wrap Over design made of colour ingrained duroplast</p> <ul style="list-style-type: none"> <li>- incl. hinge in stainless steel and nylon</li> <li>- centre distance: 7 0/10" (180 mm)</li> <li>- load of ring seat: 529,10lbs (240 kg)</li> <li>- 10 year guarantee</li> </ul>
<b>Colour Programme</b>	01 White
<b>Hinge Finish</b>	61 Stainless steel
<b>Spare parts</b>	<p>A) 9221 22 61 Hinge in stainless steel and nylon</p> <p>B) 9221 23 00 Buffer for seat and cover</p> <p>C) 9221 39 00 Soft Closing packet</p>
<b>Cleaning Instructions</b>	<p>This toilet seat has been designed and manufactured with great care and attention to detail. If you follow a few simple cleaning instructions you will be able to enjoy its comfort, quality and beauty every day:</p> <ul style="list-style-type: none"> <li>- In order to ensure the best possible hygiene the surface of the toilet seat is closed and pore-free. Please do not use abrasive, corrosive or chlorine based cleaners as these may lead to discoloration and flash rust. Please only use mild ph neutral soap for cleaning.</li> <li>- If seat and cover make contact with toilet cleaners and or other aggressive cleaners, please immediately rinse with pure water.</li> <li>- After cleaning please dry off any residual dampness with a soft cloth.</li> <li>- Seat and cover must be left in an upright position until all cleaning agents in the bowl has been flushed away.</li> </ul>
<b>Material Description</b>	<ul style="list-style-type: none"> <li>- TOILET SEAT: The material is colour ingrained duroplast (UF A 10 = urea formaldehyde) that contains no environmentally hazardous substances. UF plastic comprises 67% urea formaldehyde resin, 28% cellulose, as well as 5% minerals, pigments, lubricants and moisture content. The raw material from the supplier contains &lt; 0.03% free formaldehyde and even less following curing.</li> <li>- BUFFERS: PE (Polyethylene)</li> <li>- DAMPER KIT: Hydraulic damper with stainless steel damper casing and plastic parts</li> <li>- DAMPER LIQUID: Anti-friction liquid</li> <li>- HINGES: Stainless steel and nylon</li> </ul>

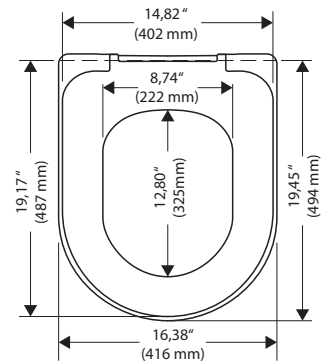

Villeroy & Boch AG  
PO box 11 20  
66688 Mettlach  
Germany

[www.villeroy-boch.com](http://www.villeroy-boch.com)

Service contact:  
E-mail: [inquiries@villeroy-boch-usa.com](mailto:inquiries@villeroy-boch-usa.com)  
Tel.: TOTO USA 888-295-8134



**Villeroy & Boch**

1748