

6661 U0 R1

Strada - Wall-mounted toilet - 1.6/0.8 gpf (6/3 lpf)

Features

- Wall-mounted toilet
- 14 5/8" x 23 5/8" (370 x 600 mm)
- 1.6/0.8 gpf (6/3 lpf)
- Washdown model
- Rear outlet
- Concealed trapway
- D-shape bowl

Optional CeramicPlus - CeramicPlus is a particularly easy-care and dirt-repellent surface. With ceramicplus water immediately forms droplets that simply flow off the surface, taking the dissolved dirt and limescale with them.



Codes / Standard applicable

- Meets and exceeds ASME A112.19.2/CSA B45.1 ASME A112.19.14
- Certifications: IAPMO(cUPC), EPA Watersense, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada and others
- EPA - Watersense



Colors - XX

- R1 = White Alpin CeramicPlus

Product Specification

This wall-mounted toilet is made of vitreous china. The wall-mounted toilet is 23 5/8" (600mm) x 14 5/8" (370mm). The product has a concealed trapway and a D-shape bowl. The product is with ceramic plus. The product has a water use of 1.6/0.8. gpf (6/3 lpf). The wall-mounted toilet is Villeroy & Boch model 6661U0.

Components


Included	
6661 U0 R1	Wall-mounted toilet
Required	
8809 U1 R1	WC-seat and cover

Installation Notes

Install this product according to the installation manual.

Back-to-Back Toilet Installations:

Villeroy & Boch recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

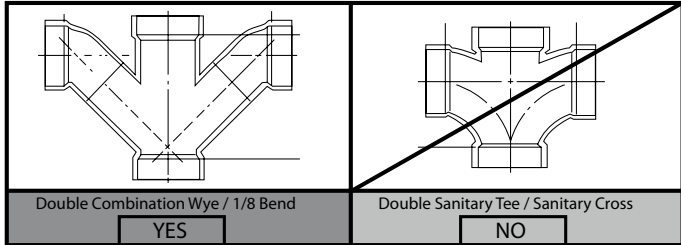

Technical Information

Water use	1.6/0.8 gpf (6/3 lpf)
Material	Vitreous china
Warranty	One year limited warranty
Min Water pressure	8 psi
Water surface	4" x 5" (100 x 129mm)
Trap diameter	2 1/8" (51mm)
Trap seal	2 1/4" (57mm)
Minimum rough-in	7" (180 mm) rough-in
Outlet	Rear outlet
Shipping dimensions	15 1/3" x 17" x 24 2/5" (390 x 430 x 620 mm)
Shipping weight	66.14 lbs (30 kg)
Net weight	49.6 lbs (22.5 kg)

Technical Drawing

