

## 4" Low Voltage

### Die-Cast Gimbal Ring Trim

| Model & Light Source                        | Lumens | Finish                        |
|---------------------------------------------|--------|-------------------------------|
| HR-D417 Halogen MR16<br>HR-D417LED LED MR16 |        | BN Brushed Nickel<br>WT White |

Example: **HR-D417-BN**

#### DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

#### FEATURES

- Accommodates most LED MR16 or Halogen MR16 lamps
- Center lamp holder allows lamp to be tilted up to 25° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

#### SPECIFICATIONS


|               |                                                                                        |
|---------------|----------------------------------------------------------------------------------------|
| Construction: | Die-cast aluminum                                                                      |
| Input:        | 12 VAC                                                                                 |
| Light Source: | LED MR16, Halogen MR16                                                                 |
| Finish:       | Electrostatically Powder Coated:White, Electrostatically Powder Coated::Brushed Nickel |
| Standards:    | UL, cUL, Damp Location Listed                                                          |



#### FINISHES:



#### LINE DRAWING:



Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## 4" Low Voltage

### Remodel Non-IC Housing

#### Model & Product

HR-8401E 4in Electronic Low Voltage  
Remodel Non-IC Housing

Example: **HR-8401E**

#### DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available with a variety of decorative adjustable and wet location trim options are available.

#### FEATURES

- Integral electronic transformer
- J-Box and transformer accessible through ceiling
- Advanced auto-reset, soft start and short circuit protection features
- Supplied thermal protector protects against over-lamping
- Suitable for 2" x 6" joist installations, for use in shallow applications
- Transformer included
- 5 year warranty

#### SPECIFICATIONS

|                    |                                                                                                                       |
|--------------------|-----------------------------------------------------------------------------------------------------------------------|
| Construction:      | 20 gauge galvanized steel                                                                                             |
| Power:             | 50W                                                                                                                   |
| Input:             | 120 VAC, 50/60Hz                                                                                                      |
| Dimming:           | ELV: 100-10%                                                                                                          |
| Light Source:      | Halogen                                                                                                               |
| Mounting:          | Two heavy gauge inner retention clips push out onto ceiling or other mounting surface to firmly hold housing in place |
| Cut Out:           | 4 9/16"                                                                                                               |
| Ceiling Thickness: | 3/4"                                                                                                                  |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                                                         |
| Standards:         | UL, cUL, Damp Location Listed, Non IC                                                                                 |

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

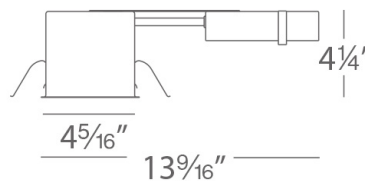

## 4" Low Voltage

### New Construction Non-IC Housing

#### Model & Product

HR-8402E 4in Electronic Low Voltage  
New Construction Non-IC Housing

Example: **HR-8402E**

#### DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available with a variety of decorative adjustable and Wet Location trim options are available.

#### FEATURES

- Integral electronic transformer
- J-Box and transformer accessible through ceiling
- Advanced auto-reset, soft start and short circuit protection features
- Supplied thermal protector protects against over-lamping
- Transformer included
- 5 year warranty

#### SPECIFICATIONS

|                    |                                                                                                               |
|--------------------|---------------------------------------------------------------------------------------------------------------|
| Construction:      | 20 gauge galvanized steel                                                                                     |
| Power:             | 50W                                                                                                           |
| Input:             | 120 VAC, 50/60Hz                                                                                              |
| Dimming:           | ELV: 100-10%                                                                                                  |
| Light Source:      | Halogen                                                                                                       |
| Mounting:          | Supplied with hanger bars, adjustable from 15"-242" to accommodate various joist construction and grid sizes. |
| Cut Out:           | 4 9/16"                                                                                                       |
| Ceiling Thickness: | 3/4"                                                                                                          |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                                                 |
| Standards:         | UL, cUL, Damp Location Listed, Non IC                                                                         |

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

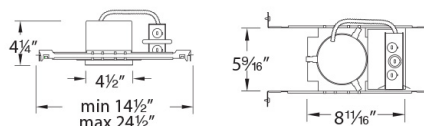

# WAC LIGHTING

## 4" Low Voltage

Die-Cast Gimbal Ring Trim

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### ACCESSORIES

|                                                                                     | <i>Model</i>                                                                         | <i>Description</i>                                           | <i>Finish</i>                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------|-------------------------------|
|    | <b>LENS-16-RED</b><br><b>LENS-16-GRN</b><br><b>LENS-16-BLU</b><br><b>LENS-16-AMB</b> | Colored Lens<br>Colored Lens<br>Colored Lens<br>Colored Lens | Red<br>Green<br>Blue<br>Amber |
|    | <b>LENS-16-FR</b>                                                                    | Clear/Frosted Lens                                           | Frosted                       |
|    | <b>LENS-16-SPR</b>                                                                   | Spread Lens                                                  | Spread Lens                   |
|  | <b>LENS-16-UVF</b>                                                                   | UV Filter lens                                               | Clear                         |
|  | <b>LENS-16-BEL</b>                                                                   | Beam Elongating Lens                                         | Beam Elongating               |
|  | <b>LENS-16-HCL</b>                                                                   | Honeycomb Louver                                             | Black                         |