

Silo Pendants

Replacement Collar

Model	Finish
M2015-C	BK Black
M2020-C	GL Gold
	WT White

Example: **M2015-C-BK**

DESCRIPTION

Silo pendants 2015 & 2020 merges superior light output with contemporary design. Dynamic beam adjusting optics are enclosed within a slender housing, supported by an understated thermal management system.

FEATURES

- Retractable accenting collar for Silo Pendant 2015 & 2020
- Black interior for improved glare performance on BK, WT finishes
- Polycarbonate (PC) construction is lightweight and durable
- 5 year warranty

SPECIFICATIONS

Finish:	Enamel Coated: White, Gold, Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL

Fixture Type: _____

Catalog Number: _____

Project: _____


Location: _____



FINISHES:



LINE DRAWING:

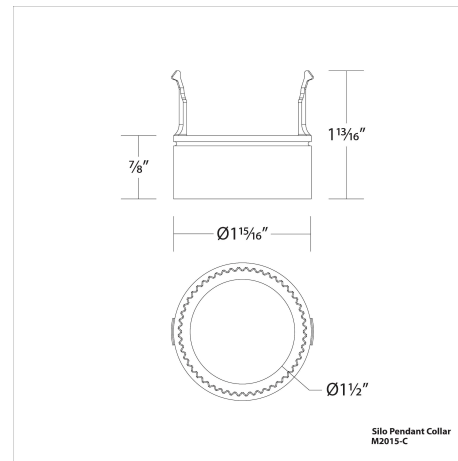

Silo 2015

H/J/L Track Pendant

System Type	Model	Color Temp & CRI	Lumens	CBCP	Finish
H	PD2015	927 2700K - 90	15°: 375 / 45°: 805	15°: 2880 / 45°: 1462	BK/BK Black/Black
J		930 3000K - 90	15°: 370 / 45°: 845	15°: 3032 / 45°: 1539	BK/GL Black/Gold
L		935 3500K - 90	15°: 415 / 45°: 885	15°: 3168 / 45°: 1608	BK/WT Black/White
		940 4000K - 90	15°: 420 / 45°: 895	15°: 3214 / 45°: 1631	WT/BK White/Black
					WT/GL White/Gold
					WT/WT White/White

Example: **H-PD2015-927-BK/BK**

DESCRIPTION

Silo pendants 2015 & 2020 merges superior light output with contemporary design. Dynamic beam adjusting optics are enclosed within a slender housing, supported by an understated thermal management system.

FEATURES

- Extruded aluminum construction
- Available as Monopoint (PD) and for H/J/L track
- Retractable accenting collar can be rotated for continuous 15°- 45° beam adjustment
- Easy wiring adjustment with cable-gripper on fixture body
- Track adapter, wire, and fixture body all match in color
- Retractable accenting collar available in multiple finishes extends up to 3/8" to create two-tone finish
- No splicing required for pendant height adjustment on track
- Driver concealed within the track adapter
- 5 year warranty

SPECIFICATIONS


Construction:	Extruded aluminum with PC retractable accenting collar
Power:	16.5W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
	3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated: White/White, Black/Black, White/Gold, White/Black, Black/Gold, Black/White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Dry Location Listed, Title 24 JA8-2019 Compliant

REPLACEMENT PARTS


M2015-C-GL - N/A
M2015-C-WT - N/A
M2015-C-BK - N/A



FINISHES:

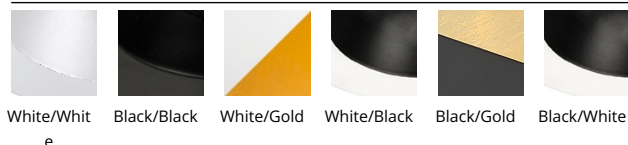

LINE DRAWING:

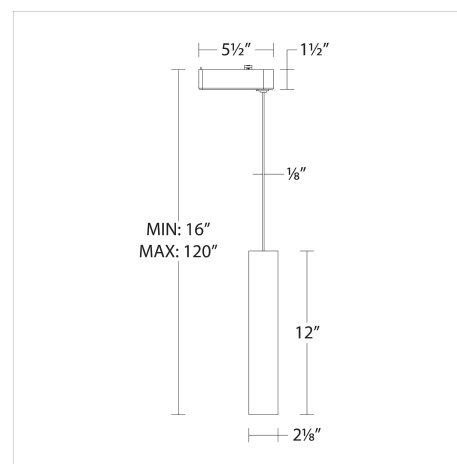

Silo 2020

H/J/L Track Pendant

System Type	Model	Color Temp & CRI	Lumens	CBCP	Finish
H	PD2020	927 2700K - 90	15°: 655 / 45°: 970	15°: 5138 / 45°: 1488	BK/BK Black/Black
J		930 3000K - 90	15°: 710 / 45°: 1050	15°: 5555 / 45°: 1609	BK/GL Black/Gold
L		935 3500K - 90	15°: 725 / 45°: 1070	15°: 5649 / 45°: 1636	BK/WT Black/White
		940 4000K - 90	15°: 760 / 45°: 1125	15°: 5944 / 45°: 1722	WT/BK White/Black
					WT/GL White/Gold
					WT/WT White/White

Example: **H-PD2020-927-BK/BK**

DESCRIPTION

A sleek, rotatable design, affording continuous 15°-45° beam adjustment. Single and two-tone finishes in a monopoint or track pendant complement any space.

FEATURES

- Extruded aluminum construction
- Available as Monopoint (PD) and for H/J/L track
- Retractable accenting collar can be rotated for continuous 15°- 45° beam adjustment
- Easy wiring adjustment with cable-gripper on fixture body
- Track adapter, wire, and fixture body all match in color
- Retractable accenting collar available in multiple finishes extends up to 3/8" to create two-tone finish
- No splicing required for pendant height adjustment on track
- Driver concealed within the track adapter
- 5 year warranty

SPECIFICATIONS

Construction:	Extruded aluminum with PC retractable accenting collar
Power:	20W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5%
Light Source:	Integrated LED
	3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated: White/Gold, White/White, Black/Black, Black/Gold, Black/White, White/Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Dry Location Listed

REPLACEMENT PARTS


M2020-C-BK - N/A
M2020-C-GL - N/A
M2020-C-WT - N/A



FINISHES:



LINE DRAWING:

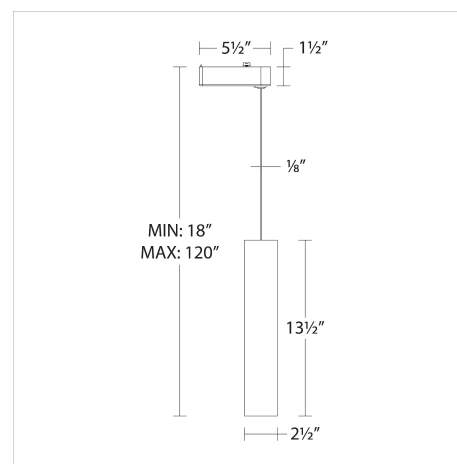

Silo 2015

Monopoint Pendant

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Color Temp & CRI	Lumens	CBCP	Finish
PD-2015	927 2700K - 90 930 3000K - 90 935 3500K - 90 940 4000K - 90	15°: 375 / 45°: 675 15°: 395 / 45°: 710 15°: 410 / 45°: 740 15°: 415 / 45°: 755	15°: 2860 / 45°: 1228 15°: 3011 / 45°: 1293 15°: 3146 / 45°: 1351 15°: 3192 / 45°: 1371	BK/BK Black/Black BK/GL Black/Gold BK/WT Black/White WT/BK White/Black WT/GL White/Gold WT/WT White/White

Example: **PD-2015-927-BK/BK**

DESCRIPTION

Silo pendants 2015 & 2020 merges superior light output with contemporary design. Dynamic beam adjusting optics are enclosed within a slender housing, supported by an understated thermal management system.

FEATURES

- Extruded aluminum construction
- Available as Monopoint (PD) and for H/J/L track
- Retractable accenting collar can be rotated for continuous 15°- 45° beam adjustment
- Easy wiring adjustment with cable-gripper on fixture body
- Canopy, wire, and fixture body all match in color
- Retractable accenting collar available in multiple finishes extends up to 3/8" to create two-tone finish
- Low profile canopy, compatible with pancake junction boxes
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Construction:	Extruded aluminum with PC retractable accenting collar
Power:	17.5-20W
Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-5%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated: White/Gold, White/White, Black/Black, Black/Gold, Black/White, White/Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Title 24 JA8-2019 Compliant

REPLACEMENT PARTS


M2015-C-BK - N/A
M2015-C-GL - N/A
M2015-C-WT - N/A



FINISHES:



LINE DRAWING:

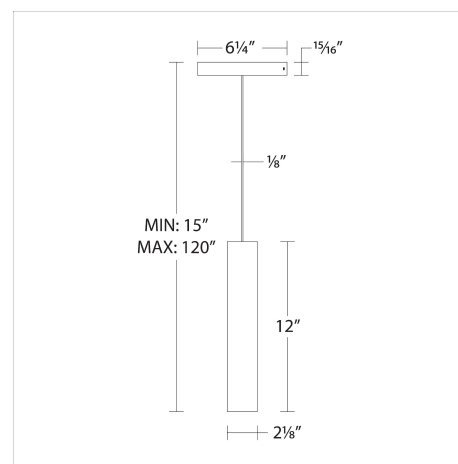

Silo 2020

Monopoint Pendant

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Color Temp & CRI	Lumens	CBCP	Finish
PD-2020	927 2700K - 90 930 3000K - 90 935 3500K - 90 940 4000K - 90	15°: 710 / 45°: 1010 15°: 765 / 45°: 1095 15°: 780 / 45°: 1110 15°: 820 / 45°: 1170	15°: 5672 / 45°: 1514 15°: 6132 / 45°: 1637 15°: 6236 / 45°: 1665 15°: 6561 / 45°: 1752	BK/BK Black/Black BK/GL Black/Gold BK/WT Black/White WT/BK White/Black WT/GL White/Gold WT/WT White/White

Example: **PD-2020-927-BK/BK**

DESCRIPTION

A sleek, rotatable design, affording continuous 15°-45° beam adjustment. Single and two-tone finishes in a monopoint or track pendant complement any space.

FEATURES

- Extruded aluminum construction
- Available as Monopoint (PD) and for H/J/L track
- Retractable accenting collar can be rotated for continuous 15°- 45° beam adjustment
- Easy wiring adjustment with cable-gripper on fixture body
- Canopy, wire, and fixture body all match in color
- Retractable accenting collar available in multiple finishes extends up to 3/8" to create two-tone finish
- Low profile canopy, compatible with pancake junction boxes
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Construction:	Extruded aluminum with PC retractable accenting collar
Power:	23.5-26W
Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-5%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated: White/White, White/Gold, White/Black, Black/White, Black/Gold, Black/Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Title 24 JA8-2019 Compliant

REPLACEMENT PARTS

M2020-C-GL - N/A
M2020-C-WT - N/A
M2020-C-BK - N/A



FINISHES:



LINE DRAWING:

