

R2FBRT, R2FBR2T

2" FQ Remodel Housing

WAC LIGHTING

SPECIFICATIONS

Input	Universal 120-277V AC 50/60 Hz
Standards:	ETL & cETL
Dimming:	Electronic Low Voltage (ELV): 100%-1% Triac: 100%-1% 0-10V: 100-1%
Mounting:	Ceiling thickness: 1/2" - 1" Ceiling cutout: Ø 3 1/2"
Construction:	20 Gauge galvanized sheet Die-cast spackle flange included
Warranty	5 year WAC Lighting product warranty


Fixture Type:

Catalog Number:

Project:

Location:

Remodel Non-IC

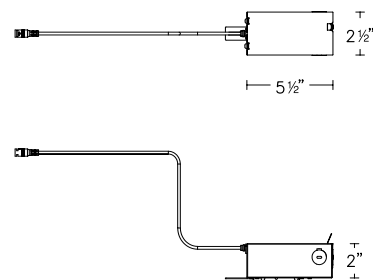


Model	Power	Rating
R2FBRT	1 15W	Non-IC
Round and Square Trim	2 21W	Non-IC
	3 25W	Non-IC

R2FBRT-__

Example: **R2FBRT-2**

Remodel IC Airtight

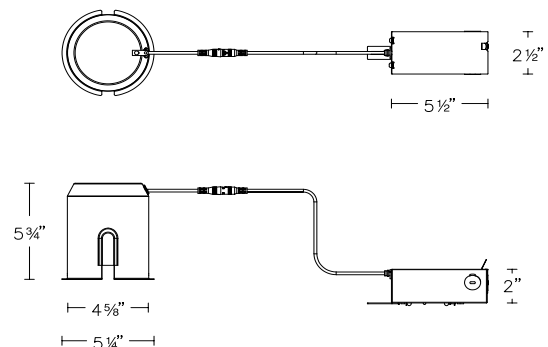

Model	Power	Rating
R2FBR2T	1 15W	IC
Round and Square DL Trim		

R2FBR2T-__

Example: **R2FBR2T-1**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760