

R2FSWL-WD

2" FQ - Square Wall Wash Trimless (Dim-To-Warm)

WAC LIGHTING



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION


The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

FEATURES

- Two-piece die-cast construction
- Light engine mounted on trim with springs for easy replacement
- Designed for even wall illumination both vertically and horizontally
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction:	Durable die-cast aluminum construction
Input	Universal 120-277V AC 50/60 Hz
Dimming:	Electronic Low Voltage (ELV): 100%-1% Triac: 100%-1% 0-10V: 100-1%
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard. Ceiling cutout: Ø 3 1/2" Accommodates 1/2" - 1" ceiling thickness
Finish:	Electrostatically powder coated White, Black, Dark Bronze. Enamel coated Haze.
Standards:	ETL & cETL Wet Location Listed, Title 24 JA8-2019 Compliant.

	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
	R2FSWL Square Trimless	A Asym	770	N/A	WD 3000K-1800K	90	BK DB HZ WT	Black Dark Bronze Haze White

R2FSWL-__-__

Example: **R2FSWL-WD-WT**

Please see next page for housing units (required)

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

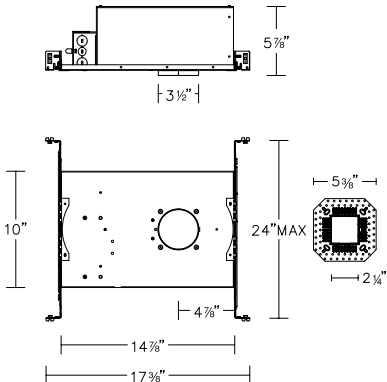
Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

R2FSWL-WD

2" FQ - Square Wall Wash Trimless (Dim-To-Warm)

WAC LIGHTING

HOUSING (Required)		Model	Power	Emergency Backup
New Construction IC Airtight	 Technical drawing of the R2FSWL-WD lighting fixture. The side view shows a height of 5 7/8" and a width of 3 1/2". The front view shows a height of 10", a width of 14 7/8" (inner) and 17 3/8" (outer), and a depth of 4 7/8". A detail view shows a square face with a 5 5/8" side length and a 2 1/4" inner square. The text '2.4" MAX' is also present near the front view.	R2FSNL	1 15W IC	N/A

R2FS____ - ____

Example: **R2FSNL-1**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760