

Patriot 3"

Downlight and Adjustable Recessed

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3HRAR R3HRDR R3HSAR R3HSDR	F 25°, 45°	9CS 2700K/3000K/3500K /4000K/5000K - 90 9CS 2700K/3000K/3500K /4000K/5000K - 90	1000 1035	3095 3045	WT White

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Example: **R3HRAR-F9CS-WT**

DESCRIPTION

Minimum profile downlight with driver and electrical connection box attached to fixture for easy remodel or new construction installation.

FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Twist-on trim with removable film to adjust beam angle
- Silicon gasket on adjustable to prevent vision past ceiling level
- Driver included
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum
Power:	12W
Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Reflector with Film
Rated Life:	50000 Hours
Mounting:	Heavy gauge rentention clips secures fixture to ceiling
Cut Out:	4 1/4"
Finish:	Electrostatically Powder Coated: White
Ceiling Thickness:	1/2" - 1 1/2"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant, IC, Airtight




FINISHES:



White

LINE DRAWING:

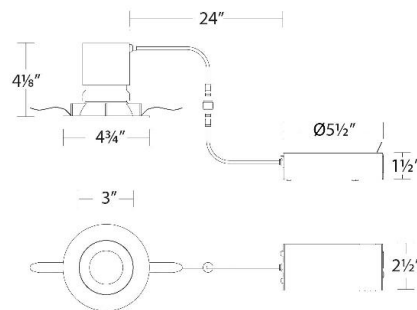

PATRIOT
R3HRDR-F9CS-WT

WAC LIGHTING

Patriot 3"

Downlight and Adjustable Recessed

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

ACCESSORIES

<i>Model</i>	<i>Description</i>	<i>Finish</i>
--------------	--------------------	---------------