

R4FBRT, R4FBR2T

4" FQ Remodel Housing

WAC LIGHTING

SPECIFICATIONS

Input	Universal 120-277V AC 50/60 Hz
Standards:	ETL & cETL
Dimming:	Electronic Low Voltage (ELV): 100%-1% Triac: 100%-1% 0-10V: 100-1%
Mounting:	Ceiling thickness: 1/2"- 1 " Ceiling cutout: Ø 4 3/4"
Construction:	20 Gauge galvanized sheet Die-cast spackle flange included
Warranty	5 year WAC Lighting product warranty


Fixture Type:

Catalog Number:

Project:

Location:


Remodel Non-IC

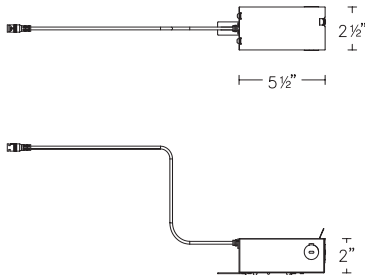

Model		Power	Rating
R4FBRT <i>Round and Square Trim</i>	1	13W	Non-IC
	2	19W	Non-IC
	3	25W	Non-IC
	4	28W	Non-IC

R4FBRT-____
Example: R4FBRT-2

Remodel IC Airtight

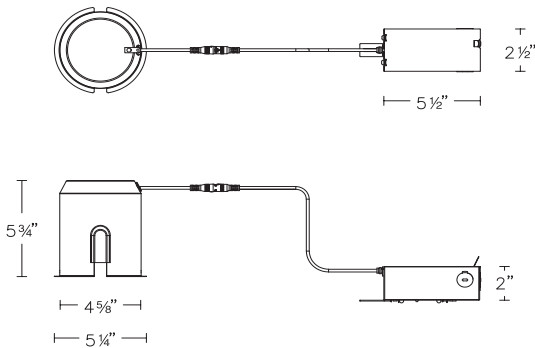

Model		Power	Rating
R4FBR2T <i>Round and Square DL Trim</i>	1	13W	IC

R4FBR2T-____
Example: R4FBR2T-1