

WAC LIGHTING

Amherst

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W17214 14"	3000K 90	BK Black	16W	1426	366

Example: **WS-W17214-BK**

For custom requests please contact customs@waclighting.com

FEATURES

- Downlight illumination
- Open bottom for ease of maintenance
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65
	Wet Location Listed
Construction:	Aluminum body, seeded clear glass diffuser

REPLACEMENT PARTS

RPL-GLA-17214 - Glass

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____




FINISHES:



Black

LINE DRAWING:

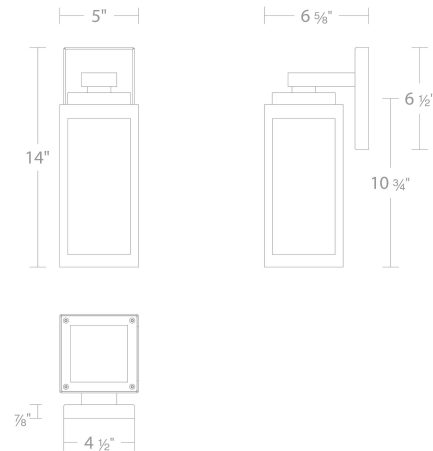

WS-W17214

WAC LIGHTING

Amherst

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W17218 18"	3000K 90	BK Black	19W	1741	490

Example: **WS-W17218-BK**

For custom requests please contact customs@waclighting.com

FEATURES

- Downlight illumination
- Open bottom for ease of maintenance
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65
	Wet Location Listed
Construction:	Aluminum body, seeded clear glass diffuser

REPLACEMENT PARTS

RPL-GLA-17218 - Glass




FINISHES:



Black

LINE DRAWING:

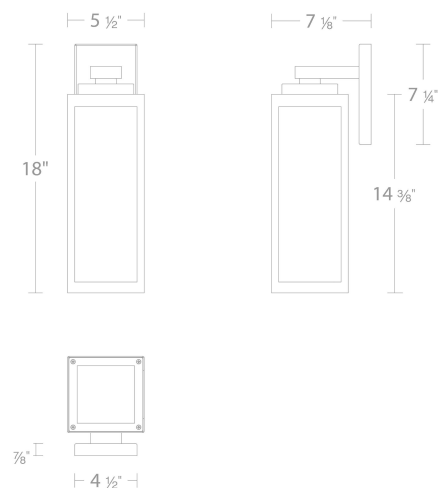

WS-W17218

WAC LIGHTING

Amherst

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W17222 22"	3000K 90	BK Black	20W	1843	452

Example: **WS-W17222-BK**

For custom requests please contact customs@waclighting.com

FEATURES


- Downlight illumination
- Open bottom for ease of maintenance
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65
	Wet Location Listed
Construction:	Aluminum body, seeded clear glass diffuser

REPLACEMENT PARTS

RPL-GLA-17222 - Glass

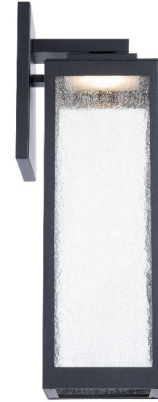


FINISHES:



Black

LINE DRAWING:

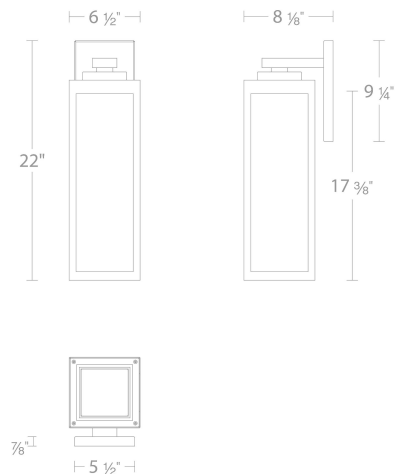

WS-W17222