MODEL DESCRIPTION LIST PRICE

ACUVA ARROW 5 HIGH FLOW Ultraviolet Disinfection System Part # WI-ARROW-5

Shipping Wt: 10 lbs.

\$1,500,95 NEW

Shipping Wt: 60 lbs.

6-PK Ea. \$1,440.95 NEW




State-of-the-Art Ultraviolet UV-LED Water Disinfection HIGH FLOW & HIGHER CAPACITY SYSTEM HOOK UP TO MULTIPLE SOURCES OF WATER

Acuva protects your family against Bacterium and Virus in your drinking water. Water Filters remove sediment, chlorine, and odor but usually don't remove microbial pathogens smaller than 5 microns in size. This system will work perfectly alongside a Body Glove Water Filter System to *Capture & Kill*: the BG system captures contaminants, *and Acuva kills up to 99.9999% of all kinds of bacteria and viruses*. Acuva's patented IntenseBeamTM Technology inactivates any microorganism present in your water with powerful UV-LEDs.

This higher capacity & flow system can be hooked up to multiple sources of water: kitchen faucet, drinking water filter faucets, ice maker, or bathroom faucet.

- Recommended for use with our BG-6000FF system.
- You could also use with BG-1000/3000/12000 PLUS your main kitchen faucet.
- Enjoy instant, on-demand and non-chemical drinking water purification with low power requirements.
- Complete with power adapter and all essential installation components.
- No maintenance costs: UV-LEDs do not require replacement or quartz cleaning.
- No mercury contamination: UV-LEDs do not contain mercury like UV-Lamp.
- Low energy consumption: consumes less than 2% of energy used by UV-Lamp.
- Sustained high performance: delivers consistent disinfection over product lifetime.

INCLUDED IN THE BOX: Acuva unit, mounting equipment and power (AC to DC).

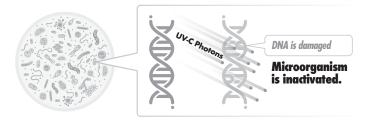

| FLOW RATE | 1.32 GPM |
|-------------------|-------------------------|
| DOSE DELIVERY | >16 mJ/cm ² |
| INLET FITTING | 3/8" OD push-to-connect |
| OUTLET FITTING | 3/8" OD push-to-connect |
| POWER CONSUMPTION | Approx. 60W (active) |

| MAX WATER TEMP | 104 [°] F |
|-------------------------------|--------------------|
| MAX WORKING PRESSURE* | 100 PSI |
| MIN WORKING PRESSURE | 40 PSI |
| LED lifetime (on demand) | 3,000 hr |
| MAX AMBIENT RELATIVE HUMIDITY | 70% |

*REFER TO OUR WATER PRESSURE WARNING AT BOTTOM OF THIS PAGE

MAXIMUM recommended line pressure for this product is 75 PSI. Pressure above 75 PSI indicates the absence of a properly functioning water pressure regulator at the property. Excessive water pressure poses a risk of property damage to you.Problems due to excessive water pressure are NOT covered by this product's warranty. BEFORE inst allation of any Water, Inc. product, confirm that water supply pressure does not exceed 75 PSI. Questions? Contact Water, Inc. Service Depart. at 800.322.WATER(9283)

Installations must comply with appropriate plumbing codes. Do not use vinyl tubing to connect any Water, Inc. Product to a water source. Polyethylene tubing is recommended for cold water applications.