

BOND

BXT27B

Bond Tandem Series Deck Mounted Exposed Tub Filler with Handshower and Two-Tone Lever Handles



FILEDESCRIPTION

TECHNICAL DETAILS

ADA Compliance: When installed per ADA guidelines
 Deck Thickness Maximum: 2"
 Deck Thickness Minimum: 1/4"
 Diameter of Legs / Tubes: 1 1/4"
 Fittings Hole Diameter: 1 3/8"
 Handle Spread Maximum: 8"
 Handle Spread Minimum: 8"
 Handle Turn Angle: Quarter Turn
 Handshower / Spray Hose Length: 59"
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Male NPT
 Inlet Supply Spread Maximum: 12 1/2"
 Inlet Supply Spread Minimum: 12 1/2"
 Integrated Diverter: Y
 Number of Holes: Two Hole
 Primary Material: Brass
 Spout Swivel: N
 Spray Included in Unit: Y
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern bath designs infused with rare soul and artistry. Explore a range of statement-making elements: fittings, washstands, mirrors and more.

PRODUCT FEATURES

Lever Handles

Diverter handle allows bather to move water from spout to handshower. Handshower features 2-1/8" head with rubber nozzles.

Features Two-Tone Handle

Stocked in Nickel and Brass


Unrestricted flow for tub spout. Handshower available in 1.75gpm (6.6L/min) flow rate

WATERWORKS

BOND

BXT27B


Bond Tandem Series Deck Mounted Exposed Tub Filler with Hand-shower and Two-Tone Lever Handles

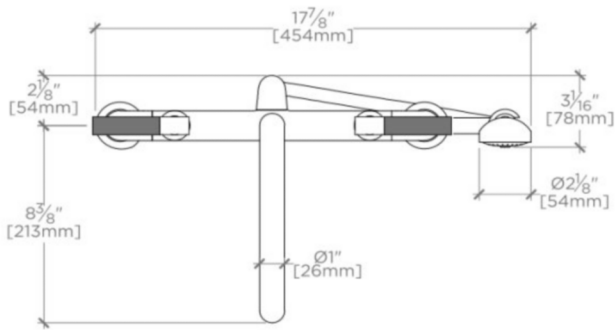

TOP VIEW


SCALE: 1 1/2"=1'-0"

† 2 ADAPTERS SUPPLIED
INTERNATIONAL USE ONLY

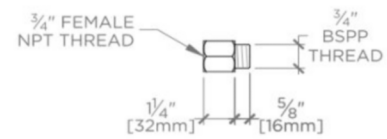


BSPP ADAPTER †

NOT TO SCALE

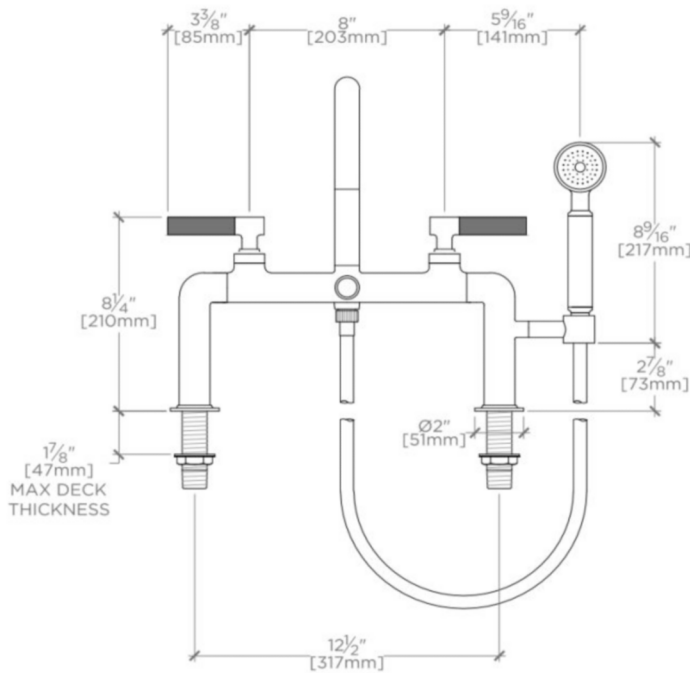

FRONT VIEW

SCALE: 1 1/2"=1'-0"

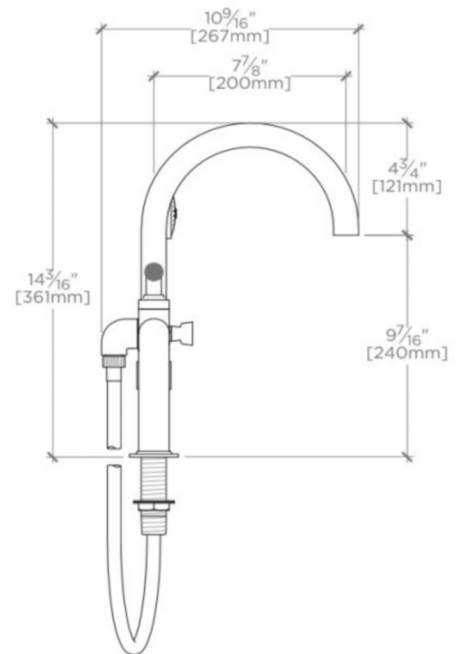

SIDE VIEW

SCALE: 1 1/2"=1'-0"