

BOND

BKM22T

Bond Tandem Series Gooseneck Kitchen Faucet and Spray with Teak Lever Handles



FILEDESCRIPTION

TECHNICAL DETAILS

Deck Thickness Maximum: 1 7/16"
Deck Thickness Minimum: 1/4"
Fittings Hole Diameter: 1 3/8"
Handle Turn Angle: Quarter Turn
Handshower / Spray Hose Length: 59"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male with Supply Nut
Integrated Diverter: Y
Restricted Maximum Flow Rate: 1.75 gpm
Spout Swivel: Y
Spray Included in Unit: Y
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 25.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

PRODUCT FEATURES


- Lever Handles
- Powerful Side spray with push button activation
- Features Metal combined with Teak Handles
- Stocked in Nickel and Brass
- Available in 1.75gpm (6.6L/min) flow rate

WATERWORKS

BOND


BKM22T

Bond Tandem Series Gooseneck Kitchen Faucet and Spray with Teak Lever Handles

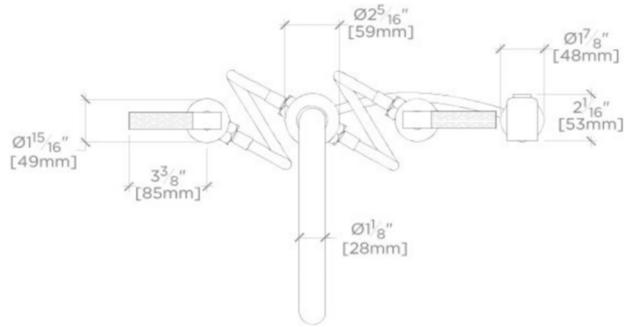


TOP VIEW

SCALE: 1 $\frac{1}{2}"$ =1'-0"

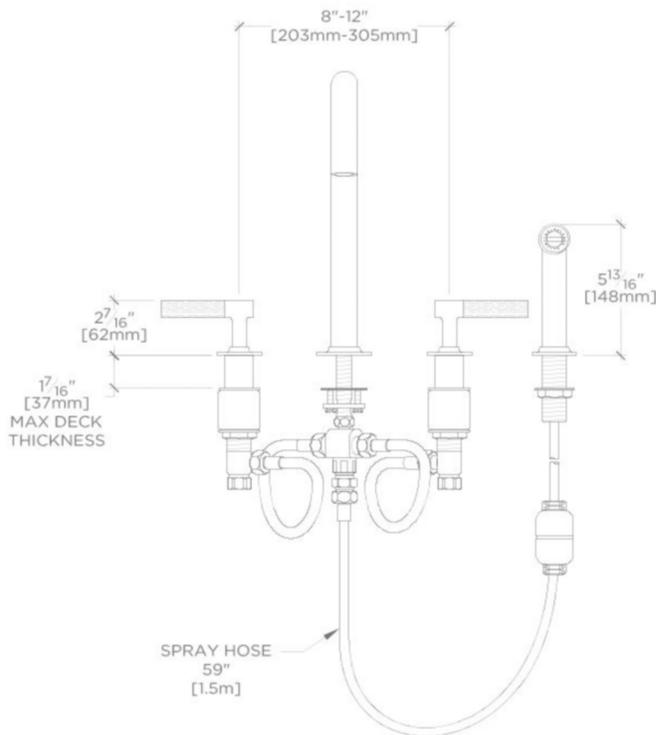

FRONT VIEW

SCALE: 1 $\frac{1}{2}"$ =1'-0"

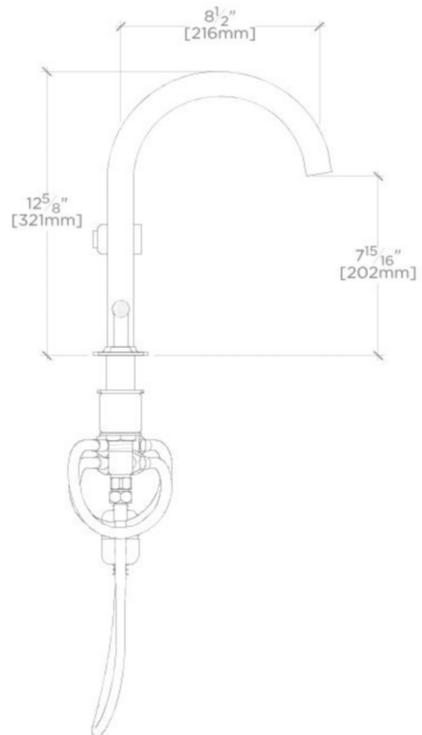

SIDE VIEW

SCALE: 1 $\frac{1}{2}"$ =1'-0"