


UNIVERSAL

GUDV2T

Universal Two Way Diverter Valve for Thermostatic Shower Systems

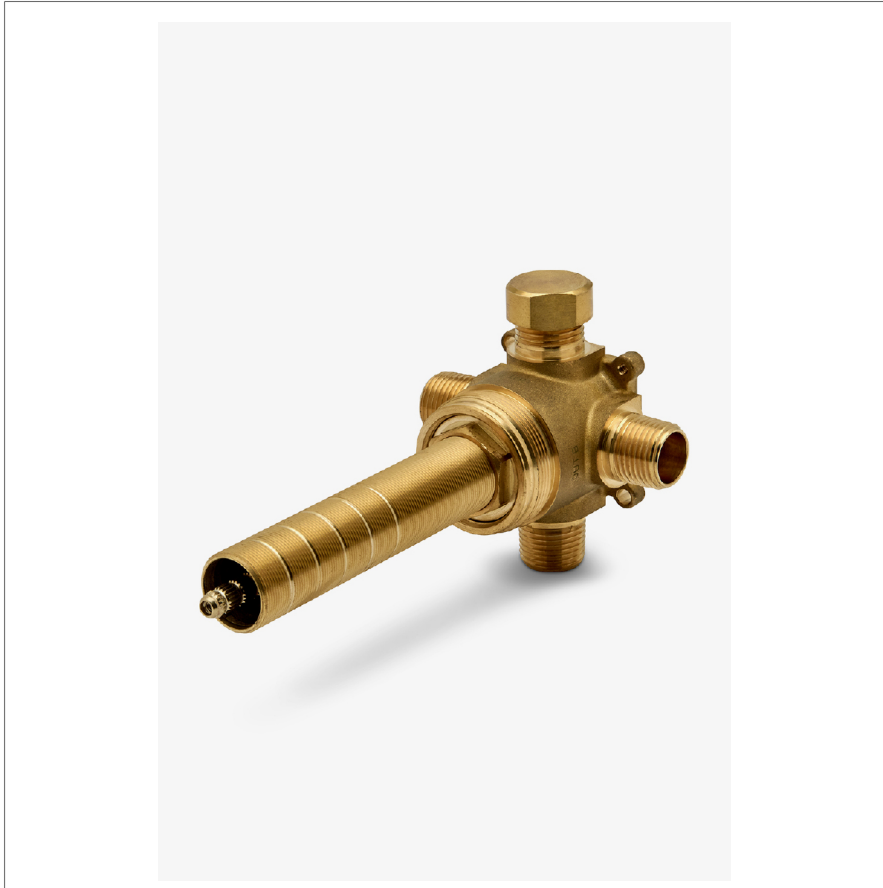

SHOWN IN UNIVERSAL TWO WAY DIVERTER VALVE FOR THERMOSTATIC SHOWER SYSTEMS | GUDV2T

TECHNICAL DETAILS

Fittings Hole Diameter: 2"
Handle Turn Angle: Quarter Turn Each Way
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Outlet Connection Size: 1/2"
Outlet Connection Type: Male NPT
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

PRODUCT FEATURES

For use with Thermostatic system 2-way diverter valve trims

Custom tile guard ensures precise tiling, while providing accessibility in servicing the valve.

Ceramic Cartridge for easy serviceability

Laser etched indications for inlets and outlets

10.5gpm unrestricted flow at 45psi

CERTIFICATIONS

PRODUCT (NOTES)


UNIVERSAL

GUDV2T


Universal Two Way Diverter Valve for Thermostatic Shower Systems



TOP VIEW SCALE: 3/4"=1"

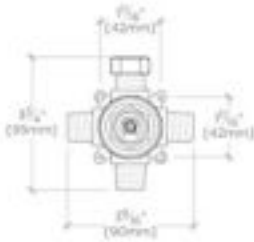

FRONT VIEW SCALE: 3/4"=1"

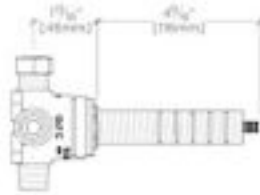

SIDE VIEW SCALE: 3/4"=1"