BOND BXT17S

Bond Rally Series Wall Mounted Exposed Tub Filler with Handshower and Lever Handles



TECHNICAL DETAILS

ADA Compliance: No Diameter Of Legs Tubes: 1 1/4" Fittings Hole Diameter: 1 3/8" Handle Spread Maximum: 8" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Handshower Spray Hose Length: 59" Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Inlet Supply Spread Maximum: 12 1/2" Inlet Supply Spread Minimum: 12 1/2" Integrated Diverter: Y Number Of Holes: Two Hole Primary Material: Brass Spout Swivel: N Spray Included In Unit: Y Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN BOND RALLY SERIES WALL MOUNTED EXPOSED TUB FILLER WITH HANDSHOWER AND LEVER HANDLES | BXT17S

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

PRODUCT FEATURES

Lever Handles

Diverter knob allows bather to move water from spout to handshower. Handshower features 2-1/8" head with rubber nozzles.

Features a Sport Black Finish, smooth and velvety to the touch

Stocked in Chrome/Sport Black


Unrestricted flow for tub spout. Handshower available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)

BOND BXT17S

Bond Rally Series Wall Mounted Exposed Tub Filler with Handshower and Lever Handles

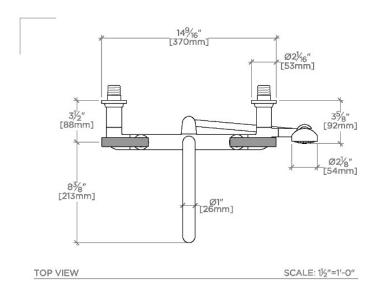





NOT TO SCALE

BSPP ADAPTER †

SIDE VIEW

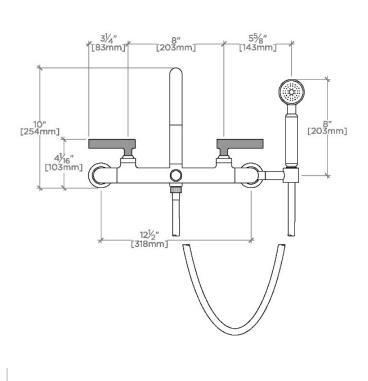

SCALE: 11/2"=1'-0"

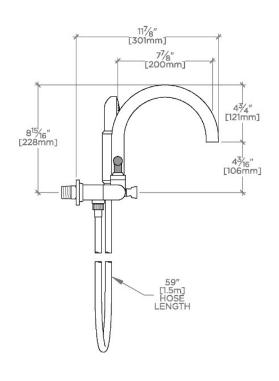

FRONT VIEW

SCALE: 11/2"=1'-0"