

BOND

BNS201

Bond 10" Rain Showerhead with 12" Ceiling Mounted Shower Arm



SHOWN IN BOND 10" RAIN SHOWERHEAD WITH 12" CEILING MOUNTED SHOWER ARM | BNS201

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
 Fittings Hole Diameter: 1 1/4"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female Straight Threads with Rubber Washer
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.75 gpm
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Features a swivel 10" rain showerhead with easy clean rubber nozzles

Includes a 12" ceiling mounted shower arm

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)

BOND


BNS201

Bond 10" Rain Showerhead with 12" Ceiling Mounted Shower Arm

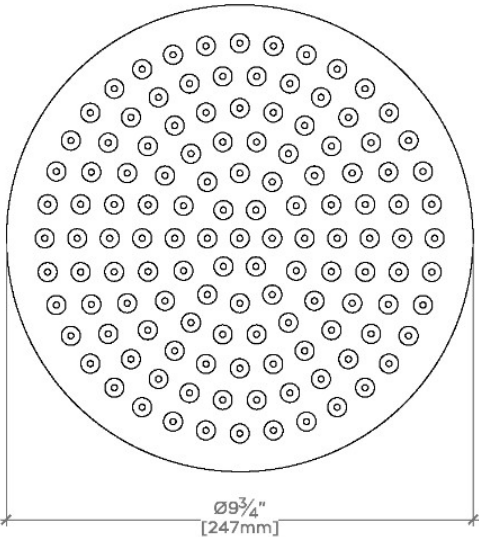


CEILING VIEW SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
BNS200	10 ⁵ / ₁₆ " [261mm]	6 ⁹ / ₁₆ " [167mm]
BNS201	16 ⁵ / ₁₆ " [414mm]	12 ⁹ / ₁₆ " [319mm]
BNS202	22 ⁵ / ₁₆ " [566mm]	18 ⁹ / ₁₆ " [472mm]

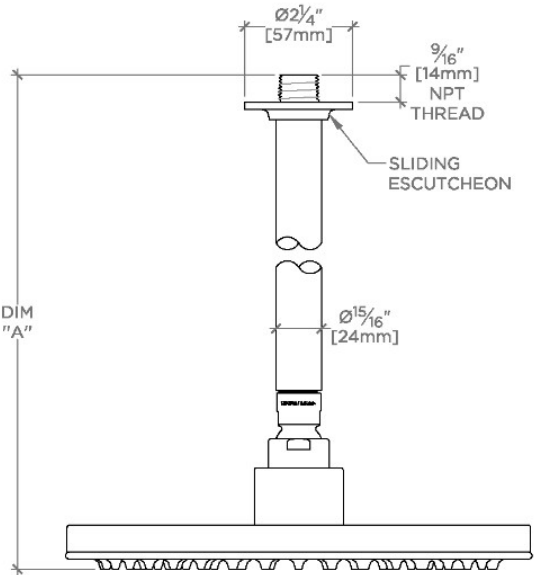

FRONT VIEW SCALE: 3"=1'-0"

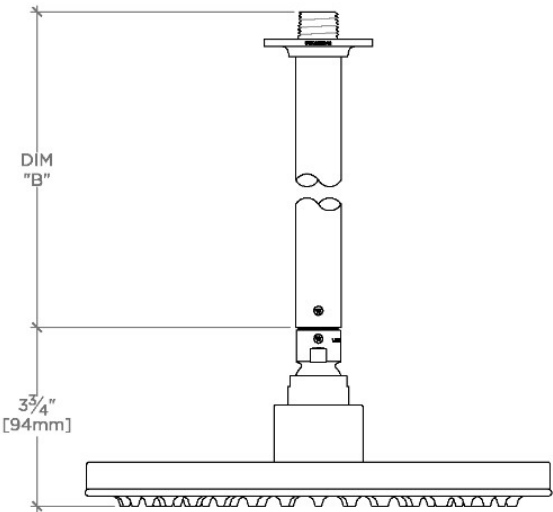

SIDE VIEW SCALE: 3"=1'-0"