

BOND

BNS220

Bond 12" Rain Showerhead with 6" Ceiling Mounted Shower Arm



SHOWN IN BOND 12" RAIN SHOWERHEAD WITH 6" CEILING MOUNTED SHOWER ARM | BNS220

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
 Fittings Hole Diameter: 1 1/4"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female Straight Threads with Rubber Washer
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.75 gpm
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Features a swivel 12" rain showerhead with easy clean rubber nozzles

Includes a 6" ceiling mounted shower arm

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)

BOND


BNS220

Bond 12" Rain Showerhead with 6" Ceiling Mounted Shower Arm




CEILING VIEW SCALE: 1 1/2"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
BNS220	10 5/16" [262mm]	6 9/16" [167mm]
BNS221	16 5/16" [414mm]	12 9/16" [319mm]
BNS222	22 5/16" [566mm]	18 9/16" [472mm]

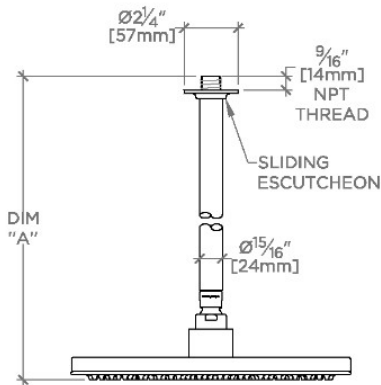

FRONT VIEW SCALE: 1 1/2"=1'-0"

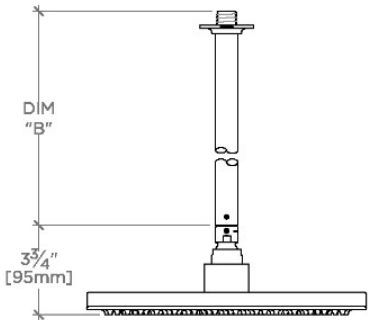

SIDE VIEW SCALE: 1 1/2"=1'-0"