

## .25

## PTS244

.25 4 1/4" Showerhead with 6" Wall Mounted 45 Degree Shower Arm



SHOWN IN .25 4 1/4" SHOWERHEAD WITH 6" WALL MOUNTED 45 DEGREE SHOWER ARM | PTS244

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed  
Fittings Hole Diameter: 1 1/4"  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Male NPT  
Pivot: Y  
Primary Material: Brass  
Restricted Maximum Flow Rate: 1.75 gpm  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

### CODES & STANDARDS

### PRODUCT FEATURES

Made of Brass

Features a swivel 4 1/4" showerhead with seven jets

Includes a 6" wall mounted 45 degree shower arm

Stocked in Brass, Chrome and Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate


### CERTIFICATIONS

### PRODUCT (NOTES)


.25

PTS244


.25 4 1/4" Showerhead with 6" Wall Mounted 45 Degree Shower Arm

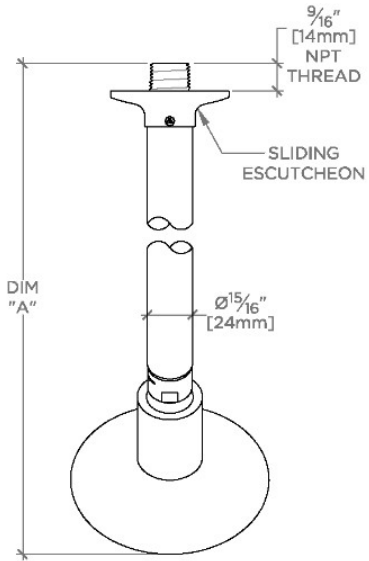

TOP VIEW SCALE: 3"=1'-0"

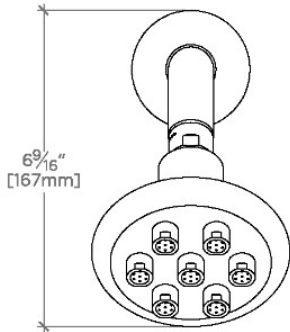

FRONT VIEW SCALE: 3"=1'-0"

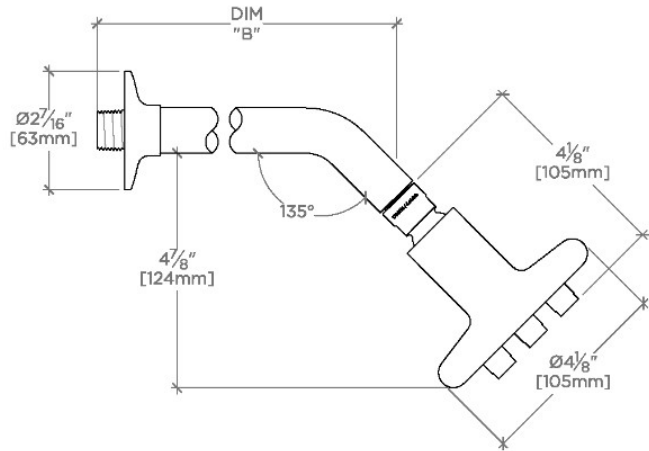

SIDE VIEW SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
LVS244	10 <sup>3</sup> / <sub>16</sub> " [259mm]	6 <sup>1</sup> / <sub>4</sub> " [158mm]
PTS244		
LVS245	12 <sup>3</sup> / <sub>16</sub> " [310mm]	8 <sup>1</sup> / <sub>4</sub> " [209mm]
PTS245		