WATERMYRK

BROOKLYN, NEW YORK

Sutton 111-9.6H Hot Water Dispenser



Fits Deck Up To 2-1/4" Thick

Recommended Mounting Hole: 1-1/8"

All Lead-Free Brass Construction

Maximum Flow Rate: 0.5 GPM

1/4 Turn Ceramic Cartridge


Handle Is NOT Spring Loaded


360° Rotating Spout

Professional Installation Required

Available in all finishes shown on the Watermark Designs website



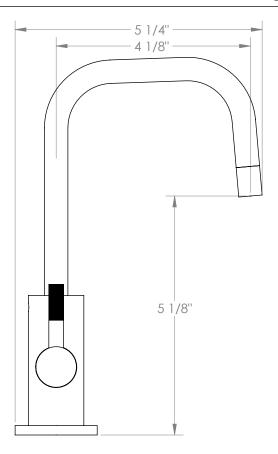

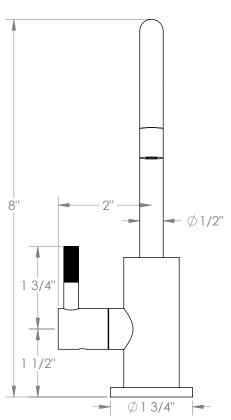

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings". Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.