## WATERMYRK

BROOKLYN, NEW YORK

Loft 2.0 23-9.6GH Hot Water Gooseneck Dispenser



Fits Deck Up To 2-1/4" Thick

Recommended Mounting Hole: 1-1/8"

All Lead-Free Brass Construction

Maximum Flow Rate: 0.5 GPM

1/4 Turn Ceramic Cartridge


Handle Is NOT Spring Loaded


360° Rotating Spout

Professional Installation Required

Available in all finishes shown on the  $\underline{\text{Watermark Designs website}}$ 



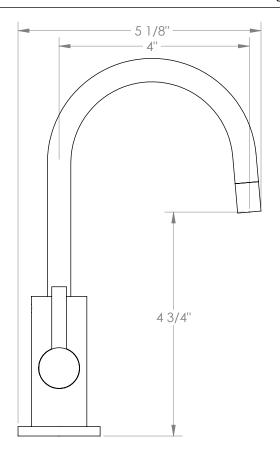

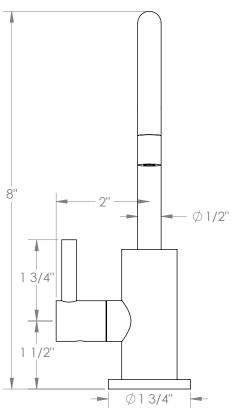

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings". Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.