WATERMYRK

BROOKLYN, NEW YORK





Recommended Mounting Hole: 1-1/8"

All Lead-Free Brass Construction

Flow Rate: 1.75 GPM

• 1/4 Turn Ceramic Cartridge


360° Rotating Spout

Professional Installation Required



Available in all finishes shown on the Watermark Designs website



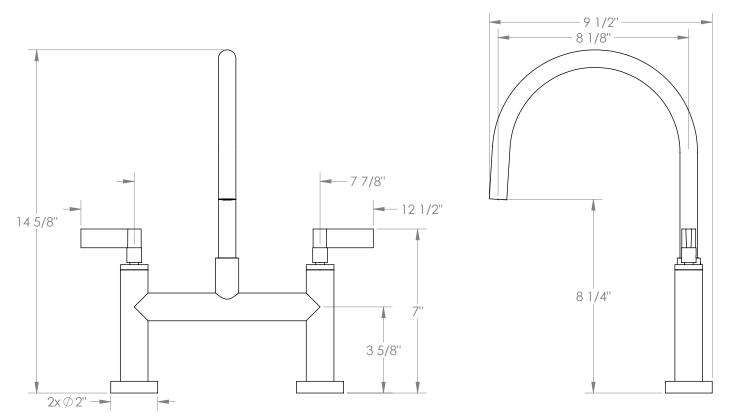

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings". Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.

09/2023