


TWO HANDLE TUB & SHOWER

SUBMITTED MODEL NO.: _____

SPECIFIC FEATURES: _____

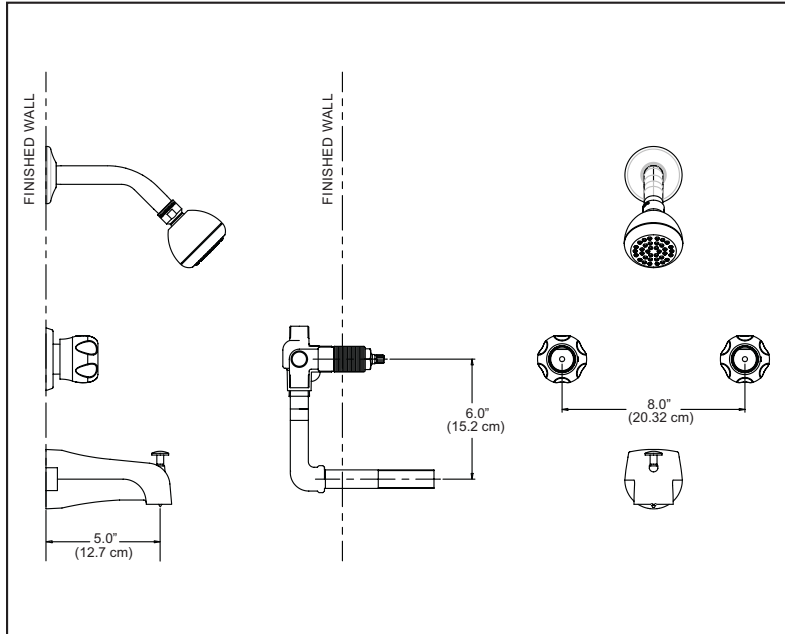

SUGGESTED SPECIFICATIONS:

- Two handle chrome bath valve, concealed type for tub and shower.
- Chrome knob handles.
- Hot and cold stem units shall be interchangeable and have stainless steel seating surfaces.
- 1.27 cm (1/2") copper inlets and outlets.
- The centre outlet shall feature a threaded reversible venturi.
- Drop elbow included with rough-in.
- Touch Clean® shower head.
- Diverter Spout.
- 82553 Rough-In.

SHOWER HEAD

- Maximum - 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa)
- Minimum - 1.8 gpm @ 45 psi (6.8 L/min @ 310 kPa)




COMPLIES WITH:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®
- Intended for replacement only and not for new construction or permitted work.

NYLON STEM – WASHERLESS


1	Reinforced nylon stem
2	Built-in positive stop
3	Stainless steel shoe
4	Self-lubricating rubber seat
5	Stainless steel spring



Waltec
Masco Canada Limited
350 South Edgeware Road
St. Thomas, ON N5P 4L1

www.waltecfaucets.ca
© 2018 Masco Canada Limited


Waltec reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

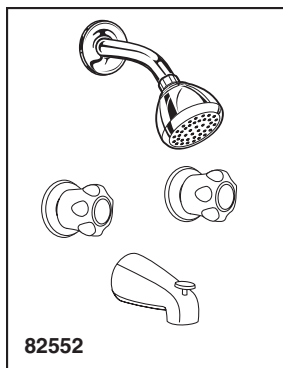

ENSEMBLES POUR BAIGNOIRE ET DOUCHE, À DEUX MANETTES

NUMÉRO DU MODÈLE SOUMIS : _____

CARACTÉRISTIQUES SPÉCIFIQUES : _____

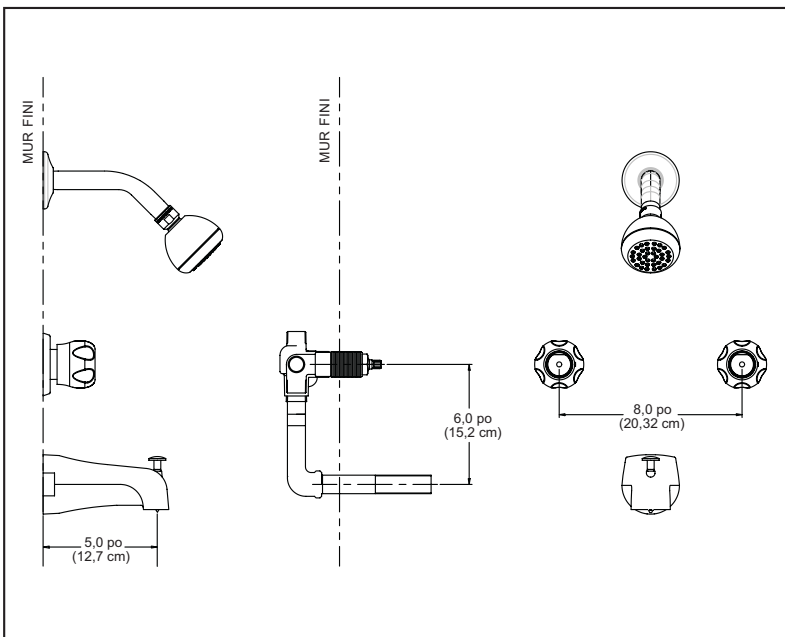

SPÉCIFICATIONS SUGGÉRÉES :

- Robinets chromés à deux manettes, à corps dissimulé pour baignoire et douche.
- Manettes chromées.
- Les tiges des côtés eau chaude et eau froide doivent être interchangeables et avoir des surfaces d'appui en acier inoxydable.
- Entrées et sorties en cuivre de 1,27 cm (1/2 po).
- La sortie centrale devra comporter un venturi réversible fileté.
- Coude de montage avec la plomberie brute.
- Pomme de douche Touch Clean.MD
- Bec inverseur.
- 82553 plomberie brute.

POMME DE DOUCHE

- Maximum - 2,0 gpm @ 80 psi (7,6 L/min @ 552 kPa)
- Minimum - 1,8 gpm @ 45 psi (6,8 L/min @ 310 kPa)



CONFORMES AUX NORMES SUIVANTES :

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®
- Destiné au remplacement uniquement et non aux nouvelles constructions ou aux travaux autorisés.

TIGE DE NYLON – COMPRESSION

1	Tige en nylon renforcée
2	Butée d'arrêt positive intégrée
3	Sabot en acier inoxydable
4	Siège en caoutchouc autolubrifiant
5	Ressort d'acier inoxydable

